

Contents



04
Nylon Cable Glands
(Type A)



07
Nylon Cable Glands
(Type B)



11
Multiple Hole & Flat Hole
Nylon Cable Glands



15
Spiral Nylon Cable Glands
(Type A)



17
Spiral Nylon Cable Glands
(Type B)



20
90 Degree Nylon Cable
Glands



21
Nylon Screw Plugs



22
EPDM Sealing Plugs



24
Mini Brass Cable Glands



25
Brass Cable Glands




28
Brass Cable Glands
(S Type)



30
EMC Brass Cable Glands



32
Multi-Hole Brass Cable
Glands



41
Metal Reducer/Enlarger



42
Round Shape Brass
Screw Plugs



43
Japan Type Marine Stuffing
Box Joint



45
Explosion-proof
Gasketing Tube



47
Stainless Steel Cable
Glands



49
Explosion-proof Stainless
Steel Cable Glands



51
Plastic Flexible Pipes



52
Quick Connector for
Flexible Pipes



54
90 Degree Quick Connector
for Flexible Pipes



56
Watertight Corrugated
Tubing Fitting



59
90 Degree Watertight
Corrugated Tubing Fitting



60
Clamping Strength
Conduit Fitting



62
Bracket for Plastic Flexible
Conduit



63
PVC Coated Flexible Steel
Conduit



64
Nylon Conduit Fitting For
Metal Flexible Conduit



65
Nylon Ferrules For
Flexible Conduit



No matter in any countries, electrical products and equipment need to be protected. The IP degree is corresponding with different working conditions and environment. The IP degree of our cable glands is on the base of international standard IEC60529. The IP code consist of the letters IP followed by two digits and an optional letter. Different digits indicate the levels of protection. Therefore, for your requirements of IP degree and sealing of the electrical products or equipment's outlines, you can choose our cable glands as the following tables.



For example: The IP68 show on our cable glands, the explain for the IP degree as follows:

IP is an abbreviation of Ingress protection. It's the degrees of protection provided against the intrusion of solid objects and water in electrical enclosures.

The first digit: "6" indicates that no ingress of dust, complete protection against contact.

The second digit: "8" indicates that the equipment inside the enclosure protect against immersion beyond 1M.

First Digit: Protect against the intrusion of solid objects

Level	Effective against
0	No protection against contact and ingress of objects
1	Protection against object size >50mm and any large surface of the body, such as the back of the hand but no protection against deliberate contact with a body part.
2	Protection against object size > 12.5mm, fingers or similar objects
3	Protection against object size > 1mm, tools, thick wires. etc.
4	Protection against object size > 1mm, most wires, screws, etc
5	Dust protected. Ingress of dust not entirely prevented, but it must not enter in sufficient quantity to interfere with the satisfactory operation of the equipment, complete protection against contact
6	Dust tight. No ingress of dust. Complete protection against contact

Protection of the equipment inside the enclosure against harmful ingress of water

Level	Effective against
0	No protected
1	Dripping water (vertically falling drops) shall have no harmful effect.
2	Vertically dripping water shall have no harmful effect when the enclosure is tilted at an angle up to 15° from it's normal position.
3	Protected against spraying water. Water falling as a spray at any angle up to 60° from the vertical shall have no harmful effect
4	Protected against splashing water. Water splashing against the enclosure from any direction shall have no harmful effect
5	Protected against water jets. Water projected by a nozzle against enclosure from any direction shall have no harmful effect
6	Protected against powerful water jets. Water projected in powerful jets against the enclosure from any direction shall have no harmful effect
7	Protected against immersion up to 1m. Ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time (up to 1m of submersion)
8	Protected against immersion beyond 1m, the equipment is suitable or continuous immersion in water under conditions which shall be specified by the manufacturer. Normally, this will mean that the equipment is hermetically sealed.



The installation of cable glands with short or long connection threads

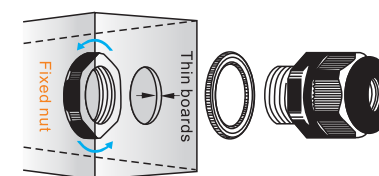


Figure a

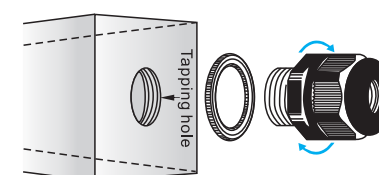


Figure b

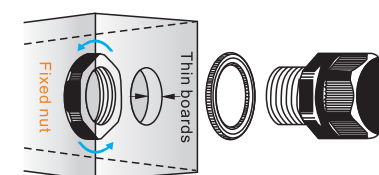


Figure c

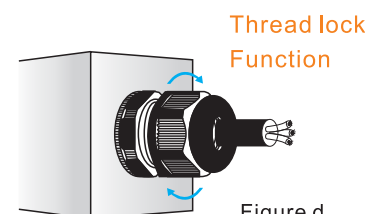


Figure d

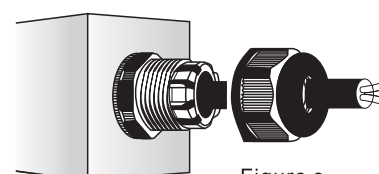


Figure e

There are many advantages of our cable glands and one of them is the length of connection thread. For different thickness of panels and enclosures. Our company provides short and long connection thread in metric cable glands for customer's option and applications.

Short connection thread

(Figure a) shows when the panel is made with thin wall & without thread hole, we can choose cable glands with short connection thread to install with lock nut onto panel to increase space from the inside panel and time saving.

(Figure b) shows if the mounting hole is female threaded, the installation is easy and time saving when you choose cable glands with short connection thread to connect with it.

Long connection thread

(Figure c) shows the thick panel without thread hole (e.g Die Cast Units), our cable glands with a long connection thread will be the best choice to install it with lock nut onto the thicker panel. The reason why our company choose metric thread type for an expanded long connection thread as a second series of our cable glands is because metric entry is widely adopted/ applied in industrial field internationally

The installation and options of A or B type Cable glands

Over the past few decades in research and development, our company has developed two series of super cable glands (Figure d): A type and B type . A type was developed by our company, through an unique patent design: the robust claw for strongest clamping strength, and the sealing insert with rim part for resistant to be took off by strong pull-out force and preventing cable abrasion from bending which are worked closely to achieve many outstanding cord-grip features (Figure e).

B type is an Europe traditional design and we refined it by a whole new hooked claw to restrain sealing insert not to be took off by put-out force and the insert with an sphere rim effect when tightened up can prevent cable abrasion from bending to achieve an another perfect patent. (Figure f).

For your reference:

Performance of A-type in water protection is scored 100 and clamping strength is scored as 101.It is recommended to use water protection with in 50m depths and arery high clamping strength required.

Preformance of B-type in clamping strength is scored as 100 and water protection is scored as 101.It is recommended for water protection deeper than 50m.

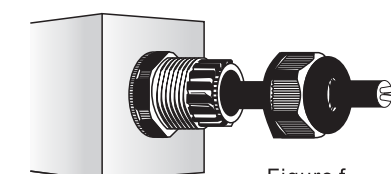







Figure f

A Type

B Type

Metric /En 50262	Thread	Pitch (mm)	Outside ϕ D1(mm)	inside ϕ D2(mm)	Thru-hole (mm)
	M12×1.5	1.5	12	10.13	12.2
	M16×1.5	1.5	16	14.13	16.2
	M20×1.5	1.5	20	18.13	20.2
	M25×1.5	1.5	25	23.13	25.2
	M32×1.5	1.5	32	30.13	32.2
	M40×1.5	1.5	40	38.43	40.2
	M50×1.5	1.5	50	48.13	50.2
	M63×1.5	1.5	63	61.13	63.2
PG Thread	Thread	Pitch (mm)	Outside ϕ D1(mm)	inside ϕ D2(mm)	Thru-hole (mm)
	PG7	1.270	12.5	11.28	12.7
	PG9	1.410	15.2	13.86	15.4
	PG11	1.410	18.6	17.26	18.8
	PG3.5	1.410	20.4	19.06	20.7
	PG16	1.588	22.5	21.16	22.8
	PG21	1.588	28.3	26.78	28.6
	PG29	1.588	37	3.48	37.4
	PG36	1.588	47	45.48	47.5
	PG42	1.588	54	52.48	54.5
	PG48	1.588	59.3	57.78	59.8
NPT Thread	Thread	Pitch (mm)	Outside ϕ D1(mm)	Of pitches n	Thru-hole (mm)
	1/4"NPT	1.411	13.716	18	
	3/8"NPT	1.411	17.145	18	
	1/2"NPT	1.814	21.336	14	
	3/4"NPT	1.814	26.67	14	
	1"NPT	2.208	33.4	11 1/2	
	1 1/4"NPT	2.208	42.164	11 1/2	
	1 1/2"NPT	2.208	48.26	11 1/2	
	2"NPT	2.208	60.325	11 1/2	
	2 1/2"NPT	3.175	73.025	8	
	3"NPT	3.175	88.9	8	
	3 1/2"NPT	3.175		8	
G(PG) Thread	Thread	Pitch (mm)	Outside ϕ D1(mm)	inside ϕ D2(mm)	Thru-hole (mm)
	G1/4"	1.337	13.157	11.145	13.4
	G3/8"	1.337	16.662	14.950	17.0
	G1/2"	1.814	20.955	18.631	21.3
	G5/8"	1.814	26.441	24.117	26.8
	G1"	2.309	33.249	30.291	33.7
	G1 1/4"	2.309	41.910	38.952	42.4
	G1 1/2"	2.309	47.803	44.845	48.3
	G2"	2.309	59.614	56.656	60.2
	G2 1/2"	3.309	75.184	72.226	75.7
	G3"	3.309	87.884	84.926	88.5
	G3 1/3"	3.309	100.330	97.372	101.0
	G4	3.309	113.303	110.072	114.0

Metric PG G(PF)

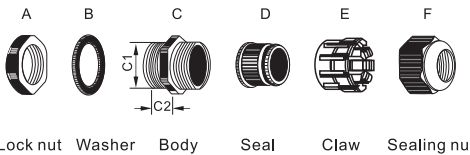

Thread: Metric, PG, G(PF) thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. E.F parts, (Accept to make flammability UL 94V-0);
EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C in static state, or instantaneous heat resistance up to 120°C;

Features: The claws and seals of excellent design, sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;

Colours: Black(RAL9005), gray(RAL7035), other color available upon request.





Nylon Cable Glands (A Type)

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M12×1.5	YSC-M12A-5.5	3-5.5	12	8.5	18/19	50
	YSC-M12A-8	4.5-7.8	12	8.5	18/19	50
M16×1.5	YSC-M16A-5.5-ST	3-3.5	16	10	22/19	50
	YSC-M16A-8-ST	4-8	16	10	22/19	50
	YSC-M16A-5.5	3-5.5	16	15	22/19	50
	YSC-M16A-8	4-8	16	15	22/19	50
	YSC-M16A-7-ST	4-7	16	10	22/22	50
	YSC-M16A-10-ST	6-10	16	10	22/22	50
	YSC-M16A-7	4-7	16	15	22/22	50
	YSC-M16A-10	6-10	16	15	22/22	50
M20×1.5	YSC-M20A-9-ST	5-9	20	10	24/24	50
	YSC-M20A-12.5-ST	6-12.5	20	10	24/24	50
	YSC-M20A-11-ST	6-11	20	10	27/27	50
	YSC-M20A-14-ST	9-14	20	10	27/27	50
	YSC-M20A-11	6-11	20	15	27/27	50
	YSC-M20A-14	9-14	20	15	27/27	50
M22×1.5	YSC-M22A-11	6-11	22	15	27/27	50
	YSC-M22A-14	9-14	22	15	27/27	50
M25×1.5	YSC-M25A-16-ST	10-16	25	10	33/33	50
	YSC-M25A-18-ST	13-18	25	10	33/33	50
	YSC-M25A-16	10-16	25	15	33/33	50
	YSC-M25A-18	13-18	25	15	33/33	50
M32×1.5	YSC-M32A-22	15-22	32	15	41/42	20
	YSC-M32A-25	18-24.5	32	15	41/42	20
M40×1.5	YSC-M40A-26	20-26	40	20	50/52	10
	YSC-M40A-31	24-31	40	20	50/52	10
M50×1.5	YSC-M50A-33	25-33	50	22	62/62	10
	YSC-M50A-41	31-41	50	22	62/62	10
M63×1.5	YSC-M63A-46	39-46	63	25	75/75	10
	YSC-M63A-51	44-51	63	25	75/75	10
M75×1.5	YSC-M75A-56	50-56	75	25	92/92	1
	YSC-M75A-66	56-66	75	25	92/92	1
M90×1.5	YSC-M90A-68	58-68	90	25	110/110	1
	YSC-M90A-77	66-77	90	25	110/110	1

Nylon Cable Glands (A Type)




Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
PG7	YSC-PG7A-5.5	3-5.5	12.5	8	17/19	50
	YSC-PG7A-8	4.5-7.8	12.5	8	17/19	50
PG9	YSC-PG9A-5.5	3-5.5	15.2	.2	22/19	50
	YSC-PG9A-8	4.5-7.8	15.2	8.2	22/19	50
PG11	YSC-PG11A-7	4-7	18.6	10	24/22	50
	YSC-PG11A-10	6-10	18.6	10	24/22	50
PG13.5	YSC-PG13.5A-8.8	5-8.8	20.4	10	27/24	50
	YSC-PG13.5A-12.5	7-12.5	20.4	10	27/24	50
PG16	YSC-PG16A-11	6-14	22.5	10.8	30/27	50
	YSC-PG16A-14	9-17	22.5	10.8	30/27	50
PG21	YSC-PG21A-16	10-16	28.3	12	36/33	50
	YSC-PG21A-18	13-18	28.3	12	36/33	50
PG29	YSC-PG29A-22	15-22	37	12	46/41	20
	YSC-PG29A-24	18-25	37	12	46/41	20
PG36	YSC-PG36A-26	20-26	47	14	57/52	10
	YSC-PG36A-31	24-31	47	14	57/52	10
PG42	YSC-PG42A-33	25-33	54	15	64/62	10
	YSC-PG42A-41	31-41	54	15	64/62	10
G(PF)1/4"	YSC-G1/4A-5	3-5.3	13.157	8.5	19/19	50
	YSC-G1/4A-8	5-7.8	13.157	8.5	19/19	50
G(PF)3/8"	YSC-G3/8A-7	4-7	16.662	10	22/22	50
	YSC-G3/8A-10	6-10	16.662	10	22/22	50
G(PF)1/2"	YSC-G1/2A-9	5-8.8	20.955	10	27/24	50
	YSC-G1/2A-12.5	7-12.5	20.955	10	27/24	50
G(PF)3/4"	YSC-G3/4A-13	7-13	26.441	12	36/33	50
	YSC-G3/4A-17.5	12.5-18	26.441	12	36/33	50
G(PF)1"	YSC-G1A-21	15-22	33.249	15	46/41	20
	YSC-G1A-24.5	17-24.5	33.249	15	46/41	20
G(PF)1 1/4"	YSC-G1 1/4A-25.5	17-25.5	41.99	15	57/52	10
	YSC-G1 1/4A-31	24-32	41.99	15	57/52	10
G(PF)1 1/2"	YSC-G1 1/2A-33	25-33	48	22	60/62	10
	YSC-G1 1/2A-41	31-41	48	22	60/62	10
G(PF)2"	YSC-G2A-46	39-46	60	26	72/65	10
	YSC-G2A-51	44-51	60	26	72/62	10



Nylon Cable Glands (B Type)

Metric PG G(PF) NPT

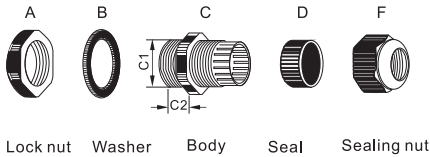

Thread: Metric, PG, G(PF), and NPT thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. F parts, (Accept to make flammability UL 94V-0);
EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C in static state,or instantaneous heat resistance up to 120°C;

Features: The claws and seals of excellent design, sealing nut have a “click”sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;

Colours: Black(RAL9005)、 gray(RAL7035),other color available upon request.

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M8×1.25	YSC-M8B-4.8	2-4.8	8	7.5	13/12	50
M10×1.5	YSC-M10B-6	3-6	10	8	15/13	50
M12×1.5	YSC-M12BS-6	3-6.5	12	8.5	18/15	50
	YSC-M12BSL-6	3-6.5	12	15	18/15	50
	YSC-M12B-5	3-5.5	12	8.5	18/19	50
	YSC-M12B-7	4-8	12	8.5	18/19	50
	YSC-M12BL-5	3-5.5	12	15	18/19	50
	YSC-M12BL-7	4-8	12	15	18/19	50

Nylon Cable Glands (B Type)



Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M16×1.5	YSC-M16BS-8	4-8	16	10	22/19	50
	YSC-M16BSL-8	4-8	16	15	22/19	50
	YSC-M16B-7	3-7	16	10	22/22	50
	YSC-M16B-10	5-10	16	10	22/22	50
	YSC-M16BL-7	3-7	16	15	22/22	50
	YSC-M16BL-10	5-10	16	15	22/22	50
M18×1.5	YSC-M18B-7	3-7	18	10	24/22	50
	YSC-M18B-10	5-10	18	10	24/22	50
	YSC-M18BL-7	3-7	18	15	24/22	50
	YSC-M18BS-10	5-10	18	15	24/22	50
M20×1.5	YSC-M20BS-12.5	6-12.5	20	10	27/24	50
	YSC-M20B-11	5-11	20	11	27/27	50
	YSC-M20B-13.5	8.5-14	20	11	27/27	50
	YSC-M20BL-11	5-11	20	15	27/27	50
	YSC-M20BL-13.5	8.5-14	20	15	27/27	50
M22×1.5	YSC-M22B-11	5-11	22	11	27/27	50
	YSC-M22B-13.5	8.5-14	22	11	27/27	50
M25×1.5	YSC-M25BS-14	8.5-14	25	11.6	33/27	50
	YSC-M25B-13	7-13	25	11.6	33/33	50
	YSC-M25B-18	12.5-18	25	11.6	33/33	50
	YSC-M25BL-13	7-13	25	15	33/33	50
	YSC-M25BL-18	12.5-18	25	15	33/33	50
M32×1.5	YSC-M32B-17.5	14-22	32	15	41/42	20
	YSC-M32B-24.5	17-24.5	32	15	41/42	20
M36×1.5	YSC-M36B-17.5	14-22	36	12	45/55	20
	YSC-M36B-24.5	17-24.5	36	12	45/42	20
M40×1.5	YSC-M40B-26.5	18-25	40	15	50/52	10
	YSC-M40B-31	23-32	40	15	50/52	10
M50×1.5	YSC-M50B-41	30-41	50	15	62/62	10
M63×1.5	YSC-M63B-46	35-46	63	18	75/65	10



Nylon Cable Glands (B Type)

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
PG7	YSC-PG7BS-6	3-6.5	12.5	8	17/15	50
	YSC-PG7B-5	3-5.5	12.5	8	17/19	50
	YSC-PG7BL-5	3-5.5	12.5	15	17/19	50
	YSC-PG7B-7	4-8	12.5	8	17/19	50
	YSC-PG7BL-7	4-8	12.5	15	17/19	50
PG9	YSC-PG9B-5.5	3-5.5	15.2	8.2	22/19	50
	YSC-PG9BL-5.5	3-5.5	15.2	15	22/19	50
	YSC-PG9B-7.5	4-8	15.2	8.2	22/19	50
	YSC-PG9BL-7.5	4-8	15.2	15	22/19	50
PG11	YSC-PG11B-7	3-7	18.6	10	24/22	50
	YSC-PG11BL-7	3-7	18.6	15	24/22	50
	YSC-PG11B-10	5-10	18.6	10	24/22	50
	YSC-PG11BL-10	5-10	18.6	15	24/22	50
PG13.5	YSC-PG13.5B-9	5-9	20.4	10	27/24	50
	YSC-PG13.5BL-9	5-9	20.4	15	27/24	50
	YSC-PG13.5B-12.5	6-12.5	20.4	10	27/24	50
	YSC-PG13.5BL-12.5	6-12.5	20.4	15	27/27	50
PG16	YSC-PG16B-11	5-11	22.5	10.8	30/27	50
	YSC-PG16BL-11	5-11	22.5	15	30/27	50
	YSC-PG16B-14	8.5-14	22.5	10.8	30/27	50
	YSC-PG16BL-14	8.5-14	22.5	15	30/27	50
PG19	YSC-PG19B-11	5-11	24.0	11	30/27	50
	YSC-PG19B-14	8.5-14	24.0	11	30/27	50
PG21	YSC-PG21B-13	7-13	28.3	12	36/33	50
	YSC-PG21BL-13	7-13	28.3	15	36/33	50
	YSC-PG21B-17.5	12.5-18	28.3	12	36/33	50
	YSC-PG21BL-17.5	12.5-18	28.3	15	36/33	50
PG25	YSC-PG25B-20	14-20	30.0	13	36/37	50
PG29	YSC-PG29B-17.5	14-22	37.0	12	46/41	20
	YSC-PG29B-24	17-25	37.0	12	46/41	20
PG36	YSC-PG36B-25.5	17-25.5	47.0	14	57/52	10
	YSC-PG36B-31	24-32	47.0	14	57/52	10
PG42	YSC-PG42B-41	30-41	54.0	15	64/62	10
PG48	YSC-PG48B-45.5	35-45.5	59.3	18	70/65	10



Nylon Cable Glands (B Type)



Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
G(PF)1/4"	YSC-G1/4B-5	3-5.5	13.157	8.5	19/19	50
	YSC-G1/4B-8	4-8	13.157	8.5	19/19	50
G(PF)3/8"	YSC-G3/8B-7	3-7	16.662	10	22/22	50
	YSC-G3/8B-10	5-10	16.662	10	22/22	50
G(PF)1/2"	YSC-G1/2B-9	5-9	20.955	10	27/24	50
	YSC-G1/2B-12.5	6-12.5	20.955	10	27/24	50
G(PF)3/4"	YSC-G3/4B-13	7-13	26.441	12	36/33	50
	YSC-G3/4B-17.5	12.5-18	26.441	12	36/33	50
G(PF)1"	YSC-G1B-17.5	15-22	33.249	15	46/41	20
	YSC-G1B-24	17-24.5	33.249	15	46/41	20
G(PF)1 1/4"	YSC-G1 1/4B-25.5	17-25.5	41.99	15	57/52	10
	YSC-G1 1/4B-31	26-31	41.99	15	57/52	10
G(PF)1 1/2"	YSC-G1 1/2B-4	32-41	48	15	60/62	10
G(PF)2"	YSC-G2B-45	35-45.5	60	18	60/62	10

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
NPT1/4"	YSC-NPT1/4B-5.5	3-5.5	13.157	8.5	19	50
	YSC-NPT1/4B-6.8	4-8	13.157	8.5	19	50
NPT3/8"	YSC-NPT3/8B-7	3-7	16.662	10	22	50
	YSC-NPT3/8B-10	5-10	16.662	10	22	50
NPT1/2"	YSC-NPT1/2B-9	5-9	20.955	10	24	50
	YSC-NPT1/2B-13	6-12.5	20.955	10	24	50
NPT3/4"	YSC-NPT3/4B-13	7-13	26.441	12	33	50
	YSC-NPT3/4B-18	12.5-18	26.441	12	33	50
NPT1"	YSC-NPT1B-17.5	15-22	33.249	15	41	20
	YSC-NPT1B-25	17-25	33.249	15	41	20
NPT1 1/4"	YSC-NPT1 1/4B-25.5	17-25.5	41.99	15	52	20
	YSC-NPT1 1/4B-31	26-31	41.99	15	52	20

Metric **PG** **G(PF)**

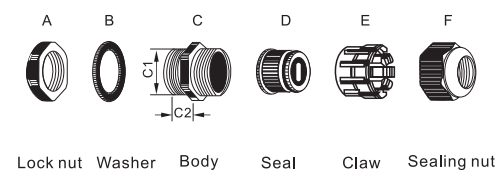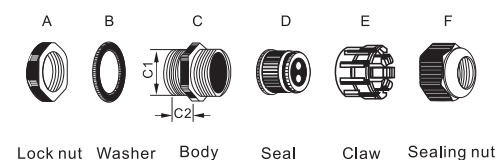

Thread: Metric, PG, G(PF) thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. E.F parts, (Accept to make flammability UL 94V-0);

EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C in static state, or instantaneous heat resistance up to 120°C;

Features: The claws and seals of excellent design, sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;

Colours: Black(RAL9005), gray(RAL7035), other color available upon request.

Seal Holes	Thread	Item No.		Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
		Black	Gray					
	M12 × 1.5	MG12A-H2-3		1.2-3	12	8.5	18/19	
	M16 × 1.5	MG16A-H2-4		1.6-4	16	10	22/22	
	M20 × 1.5	MG20A-H2-6		2.5-6	20	15	27/27	
	M22 × 1.5	MG22A-H2-6		2.5-6	22	10	29/27	
	M25 × 1.5	MG25A-H2-6.5		3-6.5	25	15	33/33	
		MG25A-H2-8		4-8	25	15	33/33	
	M32 × 1.5	MG32A-H2-10		5-10	32	15	41/41	

Seal Holes	Thread	Item No.		Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
		Black	Gray					
	PG7	PG7A-H2-3		1.2-3	12.5	8.5	17/19	
	PG9	PG9A-H2-3		1.2-3	15.2	8.5	22/19	
	PG11	PG11-H2-4		1.6-4	18.6	10	24/22	
		PG11A-H2-4		1.6-4	18.6	10	24/22	
	PG13.5	PG13.5-H2-5.3		3-5.3	20.4	10	27/24	
		PG13.5A-H2-5.3		3-5.3	20.4	10	27/24	
	PG16	PG16-H2-6		2.5-6	22.5	10.8	30/27	
		PG16A-H2-6		2.5-6	22.5	10.8	30/27	
	PG21	PG21A-H2-6.5		3-6.5	28.3	12	36/33	
		PG21A-H2-8		4-8	28.3	12	36/33	
	PG29	PG29A-H2-10		5-10	37	15	46/41	
	G3/8"	G3/8-H2-4		1.6-4	16.662	10	22/22	
	G1/2"	G1/2-H2-5.3		3-5.3	20.955	10	27/24	
	G3/4"	G3/4-H2-6		2.5-6	26.441	12	33/33	
	NPT3/8"	NPT3/8-H2-4		1.6-4	16.662	10	22	
	NPT1/2"	NPT1/2-H2-5.3		3-5.3	20.955	10	27	
	NPT3/4"	NPT3/4-H2-6		2.5-6	26.441	15	33	
	M12 × 1.5	MG12A-H3-2.6		1.2-2.6	12	8.5	18/19	
	M16 × 1.5	MG16A-H3-4		1.6-4	16	15	22/22	
	M20 × 1.5	MG20A-H3-5		2-5	20	15	27/27	
	M22 × 1.5	MG22A-H3-5		2-5	22	10	29/27	
	M25 × 1.5	MG25A-H3-5		2-5	25	15	33/33	
		MG25A-H3-8		4-8	25	15	33/33	
	M32 × 1.5	MG32A-H3-10		5-10	32	15	41/41	
		MG32A-H3-10-A		5*2	32	15	41/41	
		MG32A-H3-10-B		10*1	32	15	41/41	
		MG32A-H3-11-A		8.5*2	32	15	41/41	
		MG32A-H3-11-B		11*1	32	15	41/41	
	M40 × 1.5	MG40A-H3-11		7-11	40	20	50/50	
	M63 × 1.5	MG63A-H3-13		10-13	63	25	75/78	
	PG7	PG7A-H3-2.6		1.2-2.6	12.5	8.5	17/19	
	PG9	PG9A-H3-2.6		1.2-2.6	15.2	8.5	22/19	
	PG11	PG11A-H3-4		1.6-4	18.6	10	24/22	
	PG13.5	PG13.5A-H3-5		2-5	20.4	10	27/24	
	PG16	PG16A-H3-5		2-5	22.5	10.8	30/27	
	PG21	PG21A-H3-5		2-5	28.3	12	36/33	
		PG21A-H3-8		4-8	28.3	12	36/33	
	PG29	PG29A-H3-10		5-10	37	15	46/41	
	PG36	PG36A-H3-11		7-11	47	15	57/50	


Seal Holes	Thread	Item No.		Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
		Black	Gray					
	M12 × 1.5	MG12A-H4-2.3		1-2.3	12	8.5	18/19	
	M16 × 1.5	MG16A-H4-3.2		1.5-3.2	16	15	22/22	
	M20 × 1.5	MG20A-H4-2.5		1-2.5	20	15	27/27	
		MG20A-H4-3.5		1.5-3.5	20	15	27/27	
		MG20A-H4-4.5		2-4.5	20	15	27/27	
	M22 × 1.5	MG22A-H4-2.5		1-2.5	22	10	29/27	
		MG22A-H4-3.5		1.5-3.5	22	10	29/27	
		MG22A-H4-4.5		2-4.5	22	10	29/27	
	M25 × 1.5	MG25A-H4-5		3.5-5	25	15	33/33	
		MG25A-H4-6		4-6	25	15	33/33	
		MG25A-H4-7		5-7	25	15	33/33	
	M32 × 1.5	MG32A-H4-7		5-7	32	15	41/41	
		MG32A-H4-9		4.5-9	32	15	41/41	
M40 × 1.5	MG40A-H4-12		10-12	40	20	50/50		
	PG7	PG7A-H4-2.3		1-2.3	12.5	8.5	17/19	
	PG9	PG9A-H4-2.3		1-2.3	15.2	8.5	22/19	
	PG11	PG11A-H4-3.2		1.5-3.2	18.6	10	24/22	
	PG13.5	PG13.5A-H4-4		2-4	20.4	10	27/24	
	PG16	PG16-H4-5.5		3-5.5	22.5	10.8	30/27	
		PG16A-H4-2.5		1-2.5	22.5	10.8	30/27	
		PG16A-H4-3.5		1.5-3.5	22.5	10.8	30/27	
		PG16A-H4-4.5		2-4.5	22.5	10.8	30/27	
	PG21	PG21A-H4-5		3.5-5	28.3	12	36/33	
		PG21A-H4-6		4-6	28.3	12	36/33	
		PG21A-H4-7		5-7	28.3	12	36/33	
	PG29	PG29A-H4-7		5-7	37	15	46/41	
		PG29A-H4-9		4.5-9	37	15	46/41	
PG36	PG36A-H4-12		10-12	47	15	57/50		
	M20 × 1.5	MG20A-H5-3		1.5-3.0	20	15	27/27	
	M25 × 1.5	MG25A-H5-6-ST		3-6	25	15	33/33	
		MG25A-H5-6		3-6	25	15	33/33	
	M32 × 1.5	MG32A-H5-8		4-8	32	15	41/41	
	PG16	PG16A-H5-3		1.5-3.0	22.5	10.8	30/27	
	PG21	PG21A-H5-6		3-6	28.3	12	36/33	
	PG29	PG29A-H5-8		4-8	37	15	46/41	

[illegible]



Spiral Nylon Cable Glands(A Type)

Metric PG G(PF)

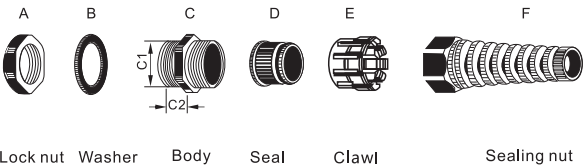

Thread: Metric, PG, G(PF) and NPT thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. E.F parts, (Accept to make flammability UL 94V-0);
EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C in static state,or instantaneous heat resistance up to 120°C;

Features: The claws and seals of excellent design, sealing nut have a “click”sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;

Colours: Black(RAL9005)、gray(RAL7035),other color available upon request.

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M12×1.5	YSC-M12A-5.5	3-5.5	12	8.5	18/19	50
	YSC-M12A-8	4.5-8	12	8.5	18/19	50
M16×1.5	YSC-M16AS-5.5-ST	3-5.5	16	10	22/19	50
	YSC-M16S-8-ST	4.5-8	16	10	22/19	50
	YSC-M16A-7-ST	4-7	16	10	22/22	50
	YSC-M16A-10-ST	6-10	16	10	22/22	50
	YSC-M16AL-7	4-7	16	15	22/22	50
	YSC-M16AL-10	6-10	16	15	22/22	50

Spiral Nylon Cable Glands(A Type)




Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M20×1.5	YSC-M20AS-11	4-8.8	20	10	27/24	20
	YSC-M20AS-14	7-12.5	20	10	27/24	20
	YSC-M20A-11-ST	7-11	20	10	27/27	20
	YSC-M20A-14-ST	9-14	20	10	27/27	20
	YSC-M20A-11	7-11	20	15	27/27	20
	YSC-M20A-14	9-14	20	15	27/27	20
M22×1.5	YSC-M22A-11-ST	7-11	22	10	29/27	20
	YSC-M22A-14-ST	9-14	22	10	29/27	20
M25×1.5	YSC-M25A-16	12-16	25	15	33/33	20
	YSC-M25A-18	14-18	25	15	33/33	20
PG7	YSC-PG7A-5.5	3-5.5	12.5	8	17/19	50
	YSC-PG7A-8	4.5-8	12.5	8	17/19	50
PG9	YSC-PG9A-5.5	3-5.5	15.2	8.2	22/19	50
	YSC-PG9A-7.58	4.5-8	15.2	8.2	22/19	50
PG11	YSC-PG11A-7	4-7	18.6	10	24/22	50
	YSC-PG11A-10	6-10	18.6	10	24/22	50
PG13.5	YSC-PG13.5A-8.8	4-8.8	20.4	10	27/24	20
	YSC-PG13.5A-12.5	7-12.5	20.4	10	27/24	20
	YSC-PG13.5AZ-8.8	7-11	20.4	10	27/27	20
	YSC-PG13.5AZ-12.5	9-14	20.4	10	27/27	20
PG16	YSC-PG16A-11	7-11	22.5	10.8	30/27	20
	YSC-PG16A-14	9-14	22.5	10.8	30/27	20
PG21	YSC-PG21A-16	10-16	28.3	12	36/33	20
	YSC-PG21A-18	13-18	28.3	12	36/33	20
G(PF)1/4"	YSC-G1/4A-5	3-5.5	13.157	8.5	19/19	50
	YSC-G1/4A-8	4-8	13.157	8.5	19/19	50
G(PF)3/8"	YSC-G3/8A-7	4-7	16.662	15	22/22	50
	YSC-G3/8A-10	6-10	16.662	15	22/22	50
G(PF)1/2"	YSC-G1/2A-9	4-8.8	20.955	15	27/24	20
	YSC-G1/2A-12.5	7-12.5	20.955	15	27/24	20
G(PF)3/4"	YSC-G3/4A-13	7-13	26.441	15	36/33	20
	YSC-G3/4A-17.5	12.5-18	26.441	15	36/33	20



Spiral Nylon Cable Glands(B Type)

Metric PG G(PF) NPT

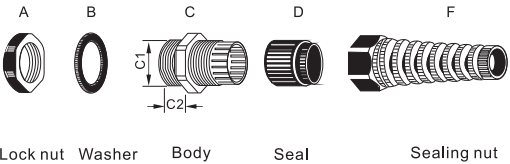

Thread: Metric, PG, G(PF) and NPT thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. F parts, (Accept to make flammability UL 94V-0);

EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C in static state,or instantaneous heat resistance up to 120°C;

Features: The claws and seals of excellent design, sealing nut have a “click”sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;

Colours: Black(RAL9005), gray(RAL7035),other color available upon request.


Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M12×1.5	YSC-M12BS-6	2-6	12	8.5	18/15	50
	YSC-M12BSL-6	2-6	12	15	18/15	50
	YSC-M12B-5	2-5	12	8.5	18/19	50
	YSC-M12B-7	3-7	12	8.5	18/19	50
	YSC-M12BL-5	2-5	12	15	18/19	50
	YSC-M12BL-7	3-7	12	15	18/19	50
M16×1.5	YSC-M16BS-8	3-8	16	10	22/19	50
	YSC-M16BSL-8	3-8	16	15	22/19	50

Spiral Nylon Cable Glands(B Type)



Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M16×1.5	YSC-M16B-5	3-7	16	10	22/22	50
	YSC-M16B-7	4-10	16	10	22/22	50
	YSC-M16BL-5	3-7	16	15	22/22	50
	YSC-M16BL-7	4-10	16	15	22/22	50
M18×1.5	YSC-M18B-7	3-7	18	10	24/22	50
	YSC-M18B-10	4-10	18	10	24/22	50
	YSC-M18BL-7	3-7	18	15	24/22	50
	YSC-M18BL-10	4-10	18	15	24/22	50
M20×1.5	YSC-M20BS-9	4-9	20	10	27/24	20
	YSC-M20BS-12.5	6-12.5	20	10	27/24	20
	YSC-M20BSL-9	4-9	20	15	27/24	20
	YSC-M20BSL-12.5	6-12.5	20	15	27/24	20
	YSC-M20B-11	5-11	20	11	27/27	20
	YSC-M20B-13.5	8-13.5	20	11	27/27	20
	YSC-M20BL-11	5-11	20	15	27/27	20
	YSC-M20BL-13.5	8-13.5	20	15	27/27	20
M22×1.5	YSC-M22B-11	5-11	22	11	30/27	20
	YSC-M22B-13.5	8-13.5	22	11	30/27	20
M25×1.5	YSC-M25BSL-9	5-11	25	11.6	33/27	20
	YSC-M25BSL-12.5	8-13.5	25	11.6	33/27	20
	YSC-M25B-16	8-16	25	11.6	33/33	20
	YSC-M25B-18	10-18	25	11.6	33/33	20
	YSC-M25BL-16	8-16	25	15	33/33	20
	YSC-M25BL-18	10-18	25	15	33/33	20
PG7	YSC-PG7BS-6	2-6	12.5	8	17/15	50
	YSC-PG7B-5	2-5	12.5	8	17/19	50
	YSC-PG7B-7	3-7	12.5	8	17/19	50
PG9	YSC-PG9B-5.5	2-5.5	15.2	8.2	22/19	50
	YSC-PG9B-7.5	3-7.5	15.2	8.2	22/19	50
PG11	YSC-PG11B-7	3-7	18.6	10	24/22	50
	YSC-PG11B-10	4-10	18.6	10	24/22	50
PG13.5	YSC-PG13.5B-9	4-9	20.4	10	27/24	20
	YSC-PG13.5B-12.5	6-12.5	20.4	10	27/24	20
PG16	YSC-PG16B-11	5-11	22.5	10.8	30/27	20
	YSC-PG16B-14	8-14	22.5	10.8	30/27	20

Thread	Item No.	Cable Range ϕ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
PG19	YSC-PG19B-11	5-11	24	10.8	30/27	20
	YSC-PG19B-14	8-14	24	10.8	30/27	20
PG21	YSC-PG21B-15.5	8-15.5	28.3	12	36/33	20
	YSC-PG21B-17.5	10-18	28.3	12	36/33	20
G(PF)3/8"	YSC-G3/8B-7	3-7	16.7	10	22/22	50
	YSC-G3/8B-10	4-10	16.7	10	22/22	50
G(PF)1/2"	YSC-G1/2B-9	4-9	20.5	10	27/24	20
	YSC-G1/2B-12.5	6-12.5	20.5	10	27/24	20
G(PF)3/4"	YSC-G3/4B-16	8-16	26.4	12	33/27	20
	YSC-G3/B-18	10-18	26.4	12	33/27	20
NPT3/8"	YSC-NPT3/8B-7	3-7	17	10	22	50
	YSC-NPT3/8B-10	4-10	17	10	22	50
NPT1/2"	YSC-NPT1/2B-9	5-9	24	10	24	20
	YSC-NPT1/2B-12.5	7-13	24	10	24	20
NPT3/4"	YSC-NPT3/4B-16	8-16	26.5	15	33	20
	YSC-NPT3/4B-18	10-18	26.5	15	33	20

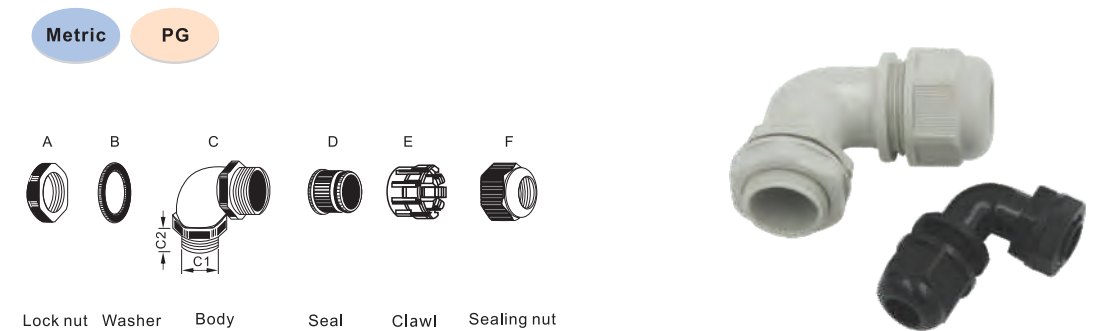

Thread: Metric, PG, G(PF) and NPT thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. F parts, (Accept to make flammability UL 94V-0);
EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C in static state, or instantaneous heat resistance up to 120°C;

Features: The claws and seals of excellent design, sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;


Colours: Black(RAL9005)、 gray(RAL7035),other color available upon request.

Thread	Item No.	Cable Range ϕ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M16×1.5	YSC-M16A-7-ST	4-7	16	10	22/22	50
	YSC-M16A-10-ST	6-10	16	10	22/22	50
M20×1.5	YSC-M20A-11	6-11	20	15	27/27	50
	YSC-M20A-14	9-14	20	15	27/27	50
M25×1.5	YSC-M25A-16	10-16	25	15	33/33	50
	YSC-M25A-18	13-18	25	15	33/33	50
M32×1.5	YSC-M32A-22	15-22	32	15	41/42	10
	YSC-M32A-25	18-24	32	15	41/42	10



Nylon Screw Plugs


Metric PG G(PF) NPT

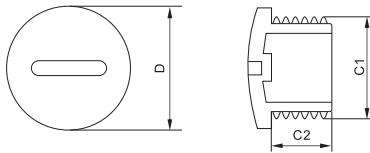

Materials: Nylon PA66;
Protection degree: IP68-10;
Working temperature: -40°C to 100°C ;
Colours: Black(RAL9005)、gray(RAL7035),other color available upon request.

Type	Thread O.D.C1(mm)	Thread Length C2(mm)	D(mm)
YSC-PG7	12.5	9.5	16.5
YSC-PG9	45.2	9.5	19.2
YSC-PG11	18.6	10	22.6
YSC-PG13.5	20.4	11	24.4
YSC-PG16	22.5	11	26.5
YSC-PG21	28.3	11	32.3
YSC-PG29	37	12	33
YSC-PG36	47	12	53
YSC-PG42	54	12	60
YSC-PG48	59.3	12	65.3
YSC-M12×1.5	12	9.5	16
YSC-M16×1.5	16	10	20
YSC-M18×1.5	18	11	22
YSC-M20×1.5	20	11	24
YSC-M22×1.5	22	11	26
YSC-M25×1.5	25	11	29
YSC-M32×1.5	32	11	38
YSC-M40×1.5	40	12	46
YSC-M50×1.5	50	12	56
YSC-M63×1.5	63	12	69

EPDM Sealing Plugs

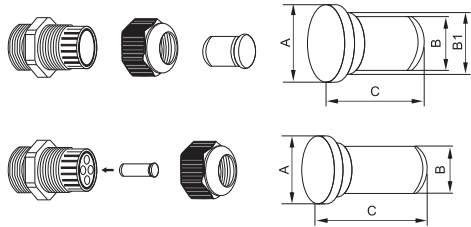

Materials: EPDM rubber;
Application: To seal spare cable glands and multiple hole seals of cable glands against dust and for water-proof.
Colours: Black(RAL9005).

EPDM Sealing Plugs for Single Hole Cable Gland


Type	Thread O.D(mm)			Thread Length C(mm)	Std.Pkg(pcs)
	A	B	B1		
YSC-055A-B	11	5.5	8.7	18	100
YSC-055B-B	9.6	5.5	7.1	18	100
YSC-067-B	9.5	6.7	7.2	18	100
YSC-071-B	13.2	7	10.7	18	100
YSC-079-B	11	7.9	8.7	18	100
YSC-092-B	15.5	9.2	12.7	18	100
YSC-103-B	13.5	10.3	10.7	18	100
YSC-105-B	17	10.5	14.3	18	100
YSC-118-B	17	11.8	14.3	18	100
YSC-120-B	15.5	12	12.7	18	100
YSC-140-B	17	14	14.4	18	100
YSC-158-B	22	15.8	19.3	18	50
YSC-178-B	22	17.8	19.3	18	50
YSC-215-B	28	21.5	25	18	50
YSC-245-B	28	24.5	25	18	50
YSC-262-B	35	26.2	33	20	10
YSC-306-B	36	30.6	33	20	10
YSC-333-B	45	33.3	43.1	20	10
YSC-410-B	46	41	43.1	20	10
YSC-473-B	53	47.3	51.6	20	10
YSC-515-B	54.5	51.5	-	20	10

EPDM Sealing Plugs for Multiple Hole Cable Gland


Type	Thread O.D(mm)		Thread Length C(mm)	Std.Pkg(pcs)
	A	B		
YSC-020-B	3	2	15	100
YSC-023-B	3	2.3	15	100
YSC-026-B	3.6	2.6	15	100
YSC-030-B	4	3	15	100
YSC-032-B	4.2	3.2	15	100
YSC-034-B	4.4	3.4	15	100
YSC-037-B	4.7	3.7	15	100
YSC-041-B	5.1	4.1	15	100
YSC-050-B	6	5	15	100
YSC-053-B	6.3	5.3	15	100
YSC-060-B	7.5	6	15	100
YSC-070-B	8.5	7	15	100
YSC-073-B	8.5	7.3	15	100
YSC-080-B	9.5	8	15	100
YSC-090-B	10.5	9	15	100
YSC-100-B	11.5	10	15	100

[illegible]

Metric



Lock nut Washer Body Seal Sealing nut



Lock nut Washer Body Seal Claw Sealing nut



Thread: Metric thread;

Materials: Brass with nickel plated for A,C,F parts,UL approved Nylon PA66 (Flammability UL 94V-2) for E part; EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C in static state, or instantaneous heat resistance up to 120°C;


Features: The claws and seals of excellent design, sealing nut have a “click” sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;

Thread	Item No.	Cable Range ϕ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
M6 × 1	YSC-M6-03	1.6-2.8	6	6-6.3	5	10/10	10
	YSC-M6-04	2.3-3.7	6	6-6.3	5	10/10	10
M8 × 1.25	YSC-M8-02	1-2.3	8	8-8.3	5.5	11/11	10
	YSC-M8-03	2.3-3.8	8	8-8.3	5.5	11/11	10
	YSC-M8-05	3.5-5	8	8-8.3	5.5	11/11	10
M10 × 1.5	YSC-M10-03	2-3.5	10	10-10.3	6	13/13	10
	YSC-M10-05	3.5-5.3	10	10-10.3	6	13/13	10
	YSC-M10-06	4.8-6.3	10	10-10.3	6	13/13	10



Brass Cable Glands

Metric PG G(PF) NPT

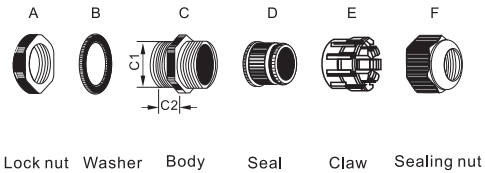

Thread: Metric, PG, G(PF),NPT thread;
Materials: Brass with nickel plated for A,C,F parts,UL approved Nylon PA66 (Flammability UL 94V-2) for E part; EPDM rubber for B, D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);
Protection degree: IP68-10 Bar;
Working temperature: -40°C to 100°C in static state,or instantaneous heat resistance up to 120°C;
Features: The claws and seals of excellent design, sealing nut have a “click”sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
M12×1.5	YSC-M12-05	3-5.3	12	12-12.3	8	17/17	10
	YSC-M12-08	4.5-7.8	12	12-12.3	8	17/17	10
M16×1.5	YSC-M16-06	4-7	16	16-16.3	9	22/22	10
	YSC-M16-10	6-10	16	16-16.3	9	22/22	10
M20×1.5	YSC-M20M-08	5-8.8	20	20-20.3	9.5	24/24	10
	YSC-M20M-11	7-12	20	20-20.3	9.5	24/24	10
	YSC-M20-13	9-14	20	20-20.3	9.5	26/26	10
M25×1.5	YSC-M25-16	12-16	25	25-25.4	12	32/32	10

Brass Cable Glands



Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
M25×1.5	YSC-M25-18	14-18	25	25-25.4	12	32/32	5
M32×1.5	YSC-M32-22	16-22	32	32-32.4	12.5	41/41	10
	YSC-M32-25	18-25	32	32-32.4	12.5	41/41	10
M40×1.5	YSC-M40-25	21-25	40	40-40.4	15	50/50	10
	YSC-M40-30	24-30	40	40-40.4	15	50/50	5
M50×1.5	YSC-M50-32	26-32	50	50-50.4	15	60/60	2
	YSC-M50-39	31-41	50	50-50.4	15	60/60	2
M63×1.5	YSC-M63-46	40-46	63	63-63.4	15	73/73	2
	YSC-M63-49	44-51	63	63-63.4	15	73/73	2
M75×1.5	YSC-M75-56	50-56	75	75-75.6	15	85/88	1
	YSC-M75-66	56-66	75	75-75.6	15	85/88	1
M90×1.5	YSC-M90-69	58-68	90	90-91	20	102/106	1
	YSC-M90-77	66-77	90	90-91	20	102/106	1
M100×1.5	YSC-M100-68	58-68	100	100-101	25	116/120	1
	YSC-M100-44	66-77	100	100-101	25	116/120	1
PG7	YSC-PG7-05	3-5.3	12.5	12.5-12.8	8	17/17	10
	YSC-PG7-08	4.5-7.8	12.5	12.5-12.8	8	17/17	10
PG9	YSC-PG9-05	3-5.8	15.2	15.2-15.5	8	18/17	10
	YSC-PG9-08	4.5-7.8	15.2	15.2-15.5	8	18/17	10
PG11	YSC-PG11-06	4-7	18.6	18.6-18.9	9	22/22	10
	YSC-PG11-10	6-10	18.6	18.6-18.9	9	22/22	10
PG13.5	YSC-PG13.5-08	5-8.8	20.4	20.4-20.7	9.5	24/24	10
	YSC-PG13.5-11	7-12	20.4	20.4-20.7	9.5	24/24	10
PG16	YSC-PG16-10	7-11	22.5	22.5-22.8	9.5	26/26	10
	YSC-PG16-13	9-14	22.5	22.5-22.8	9.5	26/26	10
PG21	YSC-PG21-16	12-16	28.3	28.3-28.7	12	32/32	10
	YSC-PG21-18	14-18	28.3	28.3-28.7	12	32/32	10
PG29	YSC-PG29-22	16-22	37	37-37.4	12.5	41/41	10
	YSC-PG29-25	18-25	37	37-37.4	12.5	41/41	10
PG36	YSC-PG36-25	21-25	47	47-47.4	15	50/50	5
	YSC-PG36-32	24-30	47	47-47.4	15	50/50	5



Brass Cable Glands

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
G(PF)1/4"	YSC-G1/4-05	3-5.3	13.157	13.2-13.4	8	17/17	10
	YSC-G1/4-08	4.5-7.8	13.157	13.2-13.4	8	17/17	10
G(PF)3/8"	YSC-G3/8-06	4-7	16.662	16.7-16.9	9	22/22	10
	YSC-G3/8-10	6-10	16.662	16.7-16.9	9	22/22	10
G(PF)1/2"	YSC-G1/2-10	7-11	20.955	21-21.2	9.5	26/26	10
	YSC-G1/2-13	9-14	20.955	21-21.2	9.5	26/26	10
G(PF)3/4"	YSC-G3/4-16	12-16	26.441	26.5-26.8	12	32/32	10
	YSC-G3/4-18	14-18	26.441	26.5-26.8	12	32/32	10
G(PF)1"	YSC-G1-22	16-22	33.249	33.3-33.6	12.5	41/41	10
	YSC-G1-25	18-25	33.249	33.3-33.6	12.5	41/41	10
G(PF)1 1/4"	YSC-G1 1/4-25	21-25	41.91	42-42.3	15	50/50	5
	YSC-G1 1/4-30	24-30	41.91	42-42.3	15	50/50	5
G(PF)1 1/2"	YSC-G1 1/2-32	26-32	47.803	48-48.4	15	60/60	2
	YSC-G1 1/2-39	31-41	47.803	48-48.4	15	60/60	2
G(PF)2"	YSC-G2-46	40-46	59.614	60-60.4	15	73/73	2
	YSC-G2-49	44-51	59.614	60-60.4	15	73/73	2
G(PF)2 1/2"	YSC-G2 1/2-56	50-56	75.184	75.2-75.6	18	85/88	1
	YSC-G21/2-66	66-56	75.184	75.2-75.6	18	85/88	1
NPT3/8"	YSC-NPT3/8-06	4-7	17.055	-	13	22	10
	YSC-NPT3/8-10	6-10	17.055	-	13	22	10
NPT1/2"	YSC-NPT1/2-10	7-11	21.223	-	13	26	10
	YSC-NPT1/2-13	9-14	21.223	-	13	26	10
NPT3/4"	YSC-NPT3/4-16	12-16	26.568	-	14	32	10
	YSC-NPT3/4-18	14-18	26.568	-	14	32	10
NPT1"	YSC-NPT1-22	16-22	33.227	-	15	41	10
	YSC-NPT1-25	18-25	33.227	-	15	41	10
NPT1 1/4"	YSC-NPT1 1/4-25	21-25	41.984	-	15	50	5
	YSC-NPT1 1/4-30	240-30	41.984	-	15	50	5

Brass Cable Glands(S Type)



Thread: Metric thread;

Materials: Brass with nickel plated for A,C,F parts,UL approved Nylon PA66 (Flammability UL 94V-2) for E part; EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C in static state,or instantaneous heat resistance up to 120°C;

Features: The claws and seals of excellent design, sealing nut have a “click”sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;


Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
M8×1.25	YSC-M8-4	4-2	8	5	11/11	
M10×1.5	YSC-M10-6	6-3	10	5	12/12	
M12×1.5	YSC-M12-6.5	6.5-3	12	7	14/14	
M14×1.5	YSC-M14-8	8-4	14	7	18/18	
M16×1.5	YSC-M16-8	8-4	16	8	18/18	
M18×1.5	YSC-M18-10	10-5	18	8	20/20	
M20×1.5	YSC-M20-12	12-6	20	8	22/22	
M22×1.5	YSC-M22-14	14-10	22	8	24/24	
M24×1.5	YSC-M24-14	14-10	24	9	24/27	
M25×1.5	YSC-M25-14	14-10	25	9	24/27	
M25×1.5	YSC-M25-18	18-13	25	9	30/27	
M27×1.5	YSC-M27-18	18-13	27	9	30/30	
M27×2	YSC-M27-18	18-13	27	9	30/30	



Brass Cable Glands(S Type)

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
M28×1.5	YSC-M28-18	18-13	28	9	30	
M28×2	YSC-M28-18	18-13	28	9	30	
M30×1.5	YSC-M30-18	18-13	30	9	30/32	
M30×2	YSC-M30-18	18-13	30	9	30/32	
M32×1.5	YSC-M32-22	22-15	32	10	35	
M32×2	YSC-M32-22	22-15	32	10	35	
M33×1.5	YSC-M33-22	22-15	33	10	35	
M33×2	YSC-M33-22	22-15	33	10	35	
M36×1.5	YSC-M36-25	25-18	36	10	40	
M36×2	YSC-M36-25	25-18	36	10	40	
M37×1.5	YSC-M37-25	25-18	37	10	40	
M37×2	YSC-M37-25	25-18	37	10	40	
M40×1.5	YSC-M40-25	25-18	40	11	40/45	
M40×1.5	YSC-M40-30	30-22	40	11	45	
M40×2	YSC-M40-25	25-18	40	11	40/45	
M40×2	YSC-M40-30	30-22	40	11	45	
M42×1.5	YSC-M42-30	30-22	42	11	45	
M42×2	YSC-M42-30	30-22	42	11	45	
M47×1.5	YSC-M47-33	33-25	47	11	50	
M47×2	YSC-M47-33	33-25	47	11	50	
M48×1.5	YSC-M48-33	33-25	48	11	50	
M48×2	YSC-M48-33	33-25	48	11	50	
M50×1.5	YSC-M50-38	38-32	50	12	57/55	
M50×2	YSC-M50-38	38-33	50	12	57/55	
M54×1.5	YSC-M54-38	38-32	54	12	57	
M54×2	YSC-M54-38	38-32	54	12	57	
M56×1.5	YSC-M56-38	38-32	56	12	57/59	
M56×2	YSC-M56-38	38-32	56	12	57/59	
M60×1.5	YSC-M60-44	44-37	60	13	65	
M60×2	YSC-M60-44	44-37	60	13	65	
M63×1.5	YSC-M63-44	44-37	63	13	65	
M63×2	YSC-M63-44	44-37	63	13	65	
M64×1.5	YSC-M64-44	44-37	64	13	65/68	
M64×2	YSC-M64-44	44-37	64	13	65/68	
M72×2	YSC-M72-52	52-42	72	15	77	
M75×2	YSC-M75-52	52-42	75	15	77	
M80×2	YSC-M80-62	62-55	80	15	90	
M88×2	YSC-M88-70	70-65	88	15	94	
M100×2	YSC-M100-84	84-78	100	15	110	

EMC Brass Cable Glands

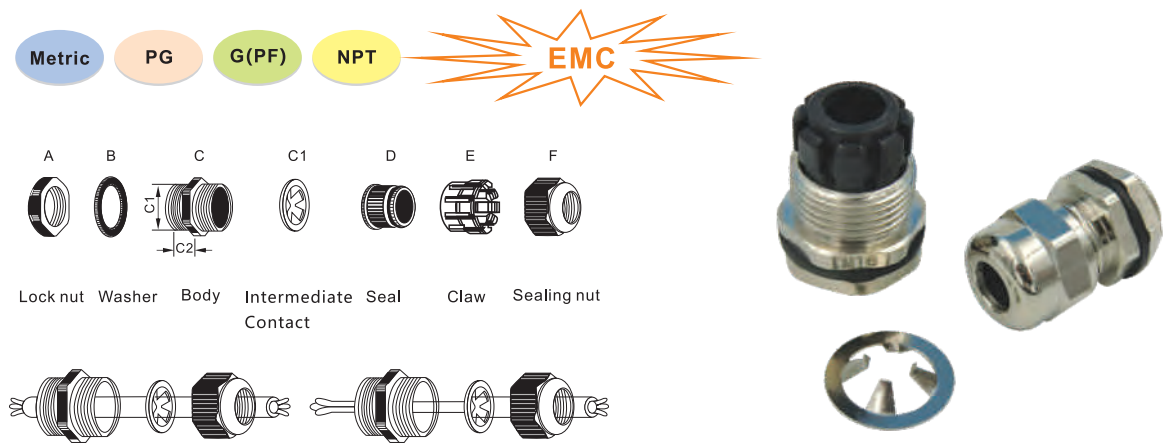

Thread: Metric, PG, G(PF),NPT thread;

Materials: Brass with nickel plated for A,C,C1,F parts,UL approved Nylon PA66 (Flammability UL 94V-2) for E part;

EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40℃ to 100℃ in static state,or instantaneous heat resistance up to 120℃;

Features: The claws and seals of excellent design, sealing nut have a “click”sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;


Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
M12×1.5	YSC-M12-05	3-5.3	12	12-12.3	8	17/17	10
	YSC-M12-08	4.5-7.8	12	12-12.3	8	17/17	10
M16×1.5	YSC-M16-06	4-7	16	16-16.3	9	22/22	10
	YSC-M16-10	6-10	16	16-16.3	9	22/22	10
M20×1.5	YSC-M20M-08	5-8.8	20	20-20.3	9.5	24/24	10
	YSC-M20M-11	7-12	20	20-20.3	9.5	24/24	10
	YSC-M20-13	9-14	20	20-20.3	9.5	26/26	10
M25×1.5	YSC-M25-16	12-16	25	25-25.4	12	32/32	10
	YSC-M25-18	14-18	25	25-25.4	12	32/32	10
M32×1.5	YSC-M32-22	16-22	32	32-32.4	12.5	41/41	10
	YSC-M32-25	18-25	32	32-32.4	12.5	41/41	10
M40×1.5	YSC-M40-25	21-25	40	40-40.4	15	50/50	5
	YSC-M40-30	24-30	40	40-40.4	15	50/50	5
M50×1.5	YSC-M50-32	26-32	50	50-50.4	15	60/60	2
	YSC-M50-39	31-41	50	50-50.4	15	60/60	2
M63×1.5	YSC-M63-46	40-46	63	63-63.4	15	73/73	2
	YSC-M63-49	44-51	63	63-63.4	15	73/73	2



EMC Brass Cable Glands

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
PG7	YSC-PG7-05	3-5.3	12.5	12.5-12.8	8	17/17	10
	YSC-PG7-08	4.5-7.8	12.5	12.5-12.8	8	17/17	10
PG9	YSC-PG9-05	3-5.8	15.2	15.2-15.5	8	18/17	10
	YSC-PG9-08	4.5-7.8	15.2	15.2-15.5	8	18/17	10
PG11	YSC-PG11-06	4-7	18.6	18.6-18.9	9	22/22	10
	YSC-PG11-10	6-10	18.6	18.6-18.9	9	22/22	10
PG13.5	YSC-PG13.5-08	5-8.8	20.4	20.4-20.7	9.5	24/24	10
	YSC-PG13.5-11	7-12	20.4	20.4-20.7	9.5	24/24	10
PG16	YSC-PG16-10	7-11	22.5	22.5-22.8	9.5	26/26	10
	YSC-PG16-13	9-14	22.5	22.5-22.8	9.5	26/26	10
PG21	YSC-PG21-16	12-16	28.3	28.3-28.7	12	32/32	10
	YSC-PG21-18	14-18	28.3	28.3-28.7	12	32/32	10
PG29	YSC-PG29-22	16-22	37	37-37.4	12.5	41/41	10
	YSC-PG29-25	18-25	37	37-37.4	12.5	41/41	10
PG36	YSC-PG36-25	21-25	47	47-47.4	15	50/50	5
	YSC-PG36-32	24-30	47	47-47.4	15	50/50	5
G(PF)1/4"	YSC-G1/4-05	3-5.3	13.157	13.2-13.4	8	17/17	10
	YSC-G1/4-08	4.5-7.8	13.157	13.2-13.4	8	17/17	10
G(PF)3/8"	YSC-G3/8-06	4-7	16.662	16.7-16.9	9	22/22	10
	YSC-G3/8-10	6-10	16.662	16.7-16.9	9	22/22	10
G(PF)1/2"	YSC-G1/2-10	7-11	20.955	21-21.2	9.5	26/26	10
	YSC-G1/2-13	9-14	20.955	21-21.2	9.5	26/26	10
G(PF)3/4"	YSC-G3/4-16	12-16	26.441	26.5-26.8	12	32/32	10
	YSC-G3/4-18	14-18	26.441	26.5-26.8	12	32/32	10
G(PF)1"	YSC-G1-22	16-22	33.249	33.3-33.6	12.5	41/41	10
	YSC-G1-25	18-25	33.249	33.3-33.6	12.5	41/41	10
G(PF)1 1/4"	YSC-G1 1/4-25	21-25	41.91	42-42.3	15	50/50	5
	YSC-G1 1/4-30	24-30	41.91	42-42.3	15	50/50	5
G(PF)1 1/2"	YSC-G1 1/2-32	26-32	47.803	48-48.4	15	60/60	2
	YSC-G1 1/2-39	31-41	47.803	48-48.4	15	60/60	2
G(PF)2"	YSC-G2-46	40-46	59.614	60-60.4	15	73/73	2
	YSC-G2-49	44-51	59.614	60-60.4	15	73/73	2
G(PF)2 1/2"	YSC-G2 1/2-56	50-56	75.184	75.2-75.6	18	85/88	1
	YSC-G21/2-66	66-56	75.184	75.2-75.6	18	85/88	1
NPT3/8"	YSC-NPT3/8-06	4-7	17.055	-	13	22	10
	YSC-NPT3/8-10	6-10	17.055	-	13	22	10
NPT1/2"	YSC-NPT1/2-10	7-11	21.223	-	13	26	10
	YSC-NPT1/2-13	9-14	21.223	-	13	26	10
NPT3/4"	YSC-NPT3/4-16	12-16	26.568	-	14	32	10
	YSC-NPT3/4-18	14-18	26.568	-	14	32	10
NPT1"	YSC-NPT1-22	16-22	33.227	-	15	41	10
	YSC-NPT1-25	18-25	33.227	-	15	41	10
NPT1 1/4"	YSC-NPT1 1/4-25	21-25	41.984	-	15	50	5
	YSC-NPT1 1/4-30	24-30	41.984	-	15	50	5

Multi-Hole Brass Cable Glands

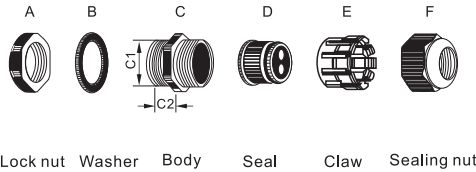

Thread: Metric, PG, G(PF),NPT thread;
Materials: Brass with nickel plated for A,C,F parts,UL approved Nylon PA66 (Flammability UL 94V-2) for E part; EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);
Protection degree: IP68-10 Bar;
Working temperature: -40°C to 100°C in static state,or instantaneous heat resistance up to 120°C;
Features: The claws and seals of excellent design, sealing nut have a “click”sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;

Seal Holes	Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
	M12 × 1.5	YSC-M12-H2-03	2-3.1	12	12-12.3	8	17/17	10
		YSC-M16-H2-02	1.6-2.6	12	16-16.3	9	22/22	10
	M16 × 1.5	YSC-M16-H2-03	2-3	16	16-16.3	9	22/22	10
		YSC-M16-H2-04	3-4.1	16	16-16.3	9	22/22	10
	M20 × 1.5	YSC-M20M-H2-05	3.5-5.2	20	20-20.3	9.5	24/24	10
		YSC-M20-H2-03	2.5-3.5	20	20-20.3	9.5	26/26	10
		YSC-M20-H2-04	3.3-4.3	20	20-20.3	9.5	26/26	10
		YSC-M20-H2-06	4.3-6.1	20	20-20.3	9.5	26/26	10
	M25 × 1.5	YSC-M25-H2-05	3.6-5.2	25	25-25.4	12	32/32	10
		YSC-M25-H2-06	5.1-6.5	25	25-25.4	12	32/32	10
		YSC-M25-H2-08	6.4-8.7	25	25-25.4	12	32/32	10
	M32 × 1.5	YSC-M32-H2-10	7.7-10	32	32-32.4	12.5	41/41	10
	M40 × 1.5	YSC-M40-H2-09	7-9	40	40-40.4	15	50/50	5
		YSC-M40-H2-13	11-13	40	40-40.4	15	50/50	5



Multi-Hole Brass Cable Glands

Seal Holes	Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
	PG7	YSC-PG7-H2-03	2-3.1	12.5	12.5-12.8	8	17/17	10
	PG9	YSC-PG9-H2-03	2-3.1	15.2	15.2-15.5	8	18/17	10
	PG11	YSC-PG11-H2-02	1.6-2.6	18.6	18.6-18.9	9	22/22	10
		YSC-PG11-H2-03	2-3	18.6	18.6-18.9	9	22/22	10
		YSC-PG11-H2-04	3-4.1	18.6	18.6-18.9	9	22/22	10
	PG13.5	YSC-PG13.5-H2-05	3.5-5.2	20.4	20.4-20.7	9.5	24/24	10
	PG16	YSC-PG16-H2-03	2.5-3.5	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-H2-04	3.3-4.3	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-H2-06	4.3-6.1	22.5	22.5-22.8	9.5	26/26	10
	PG21	YSC-PG21-H2-05	3.6-5.2	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H2-06	5.1-6.5	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H2-08	6.4-8.7	28.3	28.3-28.7	12	32/32	10
	PG29	YSC-PG29-H2-10	7.7-10	37	37-37.4	12.5	41/41	10
	PG36	YSC-PG36-H2-09	7-9	47	47-47.4	15	50/50	5
		YSC-PG36-H2-13	11-13	47	47-47.4	15	50/50	5
	G(PF)1/4"	YSC-G1/4-H2-03	2-3.1	13.157	13.2-13.4	8	17/17	10
	G(PF)3/8"	YSC-G3/8-H2-02	1.6-2.6	16.662	16.7-16.9	9	22/22	10
		YSC-G3/8-H2-03	2-3	16.662	16.7-16.9	9	22/22	10
		YSC-G3/8-H2-04	3-4.1	16.662	16.7-16.9	9	22/22	10
	G(PF)1/2"	YSC-G1/2-H2-03	2.5-3.5	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-H2-04	3.3-4.3	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-H2-06	4.3-6.1	20.955	21-21.2	9.5	26/26	10
	G(PF)3/4"	YSC-G3/4-H2-05	3.6-5.2	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H2-06	5.1-6.5	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H2-08	6.4-8.7	26.441	26.5-26.8	12	32/32	10
	G(PF)1"	YSC-G1-H2-10	7.7-10	33.249	33.3-33.6	12.5	41/41	10
	G(PF)1 1/4"	YSC-G1 1/4-H2-09	7-9	41.91	42-42.3	15	50/50	5
		YSC-G1 1/4-H2-13	11-13	41.91	42-42.3	15	50/50	5
	NPT3/8"	YSC-NPT3/8-H2-02	1.6-2.6	17.055	-	13	22	10
		YSC-NPT3/8-H2-03	2-3	17.055	-	13	22	10
		YSC-NPT3/8-H2-04	3-4.1	17.055	-	13	22	10
	NPT1/2"	YSC-NPT1/2-H2-03	2.5-3.5	21.223	-	13	26	10
		YSC-NPT1/2-H2-04	3.3-4.3	21.223	-	13	26	10
		YSC-NPT1/2-H2-06	4.3-6.1	21.223	-	13	26	10
	NPT3/4"	YSC-NPT3/4-H2-05	3.6-5.2	26.568	-	14	32	10
		YSC-NPT3/4-H2-06	5.1-6.5	26.568	-	14	32	10
		YSC-NPT3/4-H2-08	6.4-8.7	26.568	-	14	32	10
	NPT1"	YSC-NPT1-H2-10	7.7-10	33.227	-	15	41	10
	NPT1 1/4"	YSC-NPT1 1/4-H2-09	7-9	41.984	-	15	50	5
		YSC-NPT1 1/4-H2-13	11-13	41.984	-	15	50	5

Multi-Hole Brass Cable Glands



Seal Holes	Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
	M12×1.5	YSC-M12-H3-03	1.6-2.6	12	12-12.3	8	17/17	10
	M16×1.5	YSC-M16-H3-03	2-3	16	16-16.3	9	22/22	10
		YSC-M16-H3-04	3-4.2	16	16-16.3	9	22/22	10
	M20×1.5	YSC-M20M-H3-05	3.5-5	20	20-20.3	9.5	24/24	10
		YSC-M20-H3-03	2.6-3.6	20	20-20.3	9.5	26/26	10
		YSC-M20-H3-05	3.5-5.2	20	20-20.3	9.5	26/26	10
	M25×1.5	YSC-M25-H3-05	3.6-5.2	25	25-25.4	12	32/32	10
		YSC-M25-H3-06	4.8-6.2	25	25-25.4	12	32/32	10
		YSC-M25-H3-08	6.2-8	25	25-25.4	12	32/32	10
	M32×1.5	YSC-M32-H3-10	7.7-10	32	32-32.4	12.5	41/41	10
	M40×1.5	YSC-M40-H3-08	6.5-8.3	40	40-40.4	15	50/50	5
		YSC-M40-H3-10	7.7-10	40	40-40.4	15	50/50	5
	PG7	YSC-PG7-H3-03	1.6-2.6	12.5	12.5-12.8	8	17/17	10
	PG9	YSC-PG9-H3-02	1.6-2.6	15.2	15.2-15.5	8	18/17	10
	PG11	YSC-PG11-H3-03	2-3	18.6	18.6-18.9	9	22/22	10
		YSC-PG11-H3-04	3-4.2	18.6	18.6-18.9	9	22/22	10
	PG13.5	YSC-PG13.5-H3-05	3.5-5	20.4	20.4-20.7	9.5	24/24	10
	PG16	YSC-PG16-H3-03	2.6-3.6	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-H3-05	3.5-5.2	22.5	22.5-22.8	9.5	26/26	10
	PG21	YSC-PG21-H3-05	3.6-5.2	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H3-06	4.8-6.2	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H3-08	6.2-8	28.3	28.3-28.7	12	32/32	10
	PG29	YSC-PG29-H3-10	7.7-10	37	37-37.4	12.5	41/41	10
	PG36	YSC-PG36-H3-08	6.5-8.3	47	47-47.4	15	50/50	5
		YSC-PG36-H3-10	7.7-10	47	47-47.4	15	50/50	5
	G(PF)1/4"	YSC-G1/4-H3-02	1.6-2.6	13.157	13.2-13.4	8	17/17	10
	G(PF)3/8"	YSC-G3/8-H3-03	2-3	16.662	16.7-16.9	9	22/22	10
		YSC-G3/8-H3-04	3-4.2	16.662	16.7-16.9	9	22/22	10
	G(PF)1/2"	YSC-G1/2-H3-03	2.6-3.6	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-H3-05	3.5-5.2	20.955	21-21.2	9.5	26/26	10
	G(PF)3/4"	YSC-G3/4-H3-05	3.6-5.2	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H3-06	4.8-6.2	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H3-08	6.2-8	26.441	26.5-26.8	12	32/32	10
	G(PF)1"	YSC-G1-H3-10	7.7-10	33.249	33.3-33.6	12.5	41/41	10
	G(PF)1 1/4"	YSC-G1 1/4-H3-08	6.5-8.3	41.91	42-42.3	15	50/50	5
		YSC-G1 1/4-H3-10	7.7-10	41.91	42-42.3	15	50/50	5

Seal Holes	Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
	NPT3/8"	YSC-NPT3/8-H3-03	2-3	17.055	-	13	22	10
		YSC-NPT3/8-H3-04	3-4.2	17.055	-	13	22	10
	NPT1/2"	YSC-NPT1/2-H3-03	2.6-3.6	21.223	-	13	26	10
		YSC-NPT1/2-H3-05	3.5-5.2	21.223	-	13	26	10
	NPT3/4"	YSC-NPT3/4-H3-05	3.6-5.2	26.568	-	14	32	10
		YSC-NPT3/4-H3-06	4.8-6.2	26.568	-	14	32	10
		YSC-NPT3/4-H3-08	6.2-8	26.568	-	14	32	10
	NPT1"	YSC-NPT1-H3-10	7.7-10	33.227	-	15	41	10
	NPT1 1/4"	YSC-NPT1 1/4-H3-08	6.5-8.3	41.984	-	15	50	5
		YSC-NPT1 1/4-H3-10	7.7-10	41.984	-	15	50	5
	M12×1.5	YSC-M12-H4-03	1.3-2.3	12	12-12.3	8	17/17	10
	M16×1.5	YSC-M16-H4-02	1.4-2.4	16	16-16.3	9	22/22	10
		YSC-M16-H4-03	2.4-3.4	16	16-16.3	9	22/22	10
	M20×1.5	YSC-M20M-H4-04	3-4.2	20	20-20.3	9.5	24/24	10
		YSC-M20-H4-02	1.6-2.5	20	20-20.3	9.5	26/26	10
		YSC-M20-H4-03	2.6-3.6	20	20-20.3	9.5	26/26	10
		YSC-M20-H4-04	3.4-4.8	20	20-20.3	9.5	26/26	10
	M25×1.5	YSC-M25-H4-03	2-3.1	25	25-25.4	12	32/32	10
		YSC-M25-H4-04	3-4.1	25	25-25.4	12	32/32	10
		YSC-M25-H4-05	3.8-5.2	25	25-25.4	12	32/32	10
		YSC-M25-H4-07	5.6-7.3	25	25-25.4	12	32/32	10
	M32×1.5	YSC-M32-H4-09	7-9	32	32-32.4	12.5	41/41	10
	M40×1.5	YSC-M40-H4-12	10-12	40	40-40.4	15	50/50	5
	PG7	YSC-PG7-H4-02	1.3-2.3	12.5	12.5-12.8	8	17/17	10
	PG9	YSC-PG9-H4-02	1.3-2.3	15.2	15.2-15.5	8	18/17	10
	PG11	YSC-PG11-H4-02	1.4-2.4	18.6	18.6-18.9	9	22/22	10
		YSC-PG11-H4-03	2.4-3.4	18.6	18.6-18.9	9	22/22	10
	PG13.5	YSC-PG13.5-H4-04	3-4.2	20.4	20.4-20.7	9.5	24/24	10
	PG16	YSC-PG16-H4-02	1.6-2.5	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-H4-03	2.6-3.6	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-H4-04	3.4-4.8	22.5	22.5-22.8	9.5	26/26	10
	PG21	YSC-PG21-H4-02	2-3.1	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H4-03	3-4.1	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H4-04	3.8-5.2	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H4-07	5.6-7.3	28.3	28.3-28.7	12	32/32	10
	PG29	YSC-PG29-H4-09	7-9	37	37-37.4	12.5	41/41	5
	PG36	YSC-PG36-H4-12	10-12	47	47-47.4	15	50/50	

Seal Holes	Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
	G(PF)1/4"	YSC-G1/4-H4-02	1.3-2.3	13.157	13.2-13.4	8	17/17	10
	G(PF)3/8"	YSC-G3/8-H4-02	1.4-2.4	16.662	16.7-16.9	9	22/22	10
		YSC-G3/8-H4-03	2.4-3.4	16.662	16.7-16.9	9	22/22	10
	G(PF)1/2"	YSC-G1/2-H4-03	1.6-2.5	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-H4-03	2.6-3.6	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-H4-03	3.4-4.8	20.955	21-21.2	9.5	26/26	10
	G(PF)3/4"	YSC-G3/4-H4-03	2-3.1	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H4-04	3-4.1	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H4-05	3.8-5.2	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H4-07	5.6-7.3	26.441	26.5-26.8	12	32/32	10
	G(PF)1"	YSC-G1-H4-09	7-9	33.249	33.3-33.6	12.5	41/41	10
	G(PF)1 1/4"	YSC-G1 1/4-H4-12	10-12	41.91	42-42.3	15	50/50	5
	NPT3/8"	YSC-NPT3/8-H4-02	1.4-2.4	17.055	-	13	22	10
		YSC-NPT3/8-H4-03	2.4-3.4	17.055	-	13	22	10
	NPT1/2"	YSC-NPT1/2-H4-02	1.6-2.5	21.223	-	13	26	10
		YSC-NPT1/2-H4-03	2.6-3.6	21.223	-	13	26	10
		YSC-NPT1/2-H4-04	3.4-4.8	21.223	-	13	26	10
	NPT3/4"	YSC-NPT3/4-H4-03	2-3.1	26.568	-	14	32	10
		YSC-NPT3/4-H4-04	3-4.1	26.568	-	14	32	10
		YSC-NPT3/4-H4-05	3.8-5.2	26.568	-	14	32	10
		YSC-NPT3/4-H4-07	5.6-7.3	26.568	-	14	32	10
	NPT1"	YSC-NPT1-H4-09	7-9	33.227	-	15	41	10
	NPT1 1/4"	YSC-NPT1 1/4-H4-12	10-12	41.984	-	15	50	5
	M16×1.5	YSC-M16-H5-02	2-2.8	16	16-16.3	9	22/22	10
	M20×1.5	YSC-M20-H5-02	1.3-2	20	20-20.3	9.5	26/26	10
		YSC-M20-H5-03	3-3.1	20	20-20.3	9.5	26/26	10
		YSC-M20-H5-04	3-4.1	20	20-20.3	9.5	26/26	10
	M25×1.5	YSC-M25-H5-03	2.6-3.6	25	25-25.4	12	32/32	10
		YSC-M25-H5-04	3.6-4.6	25	25-25.4	12	32/32	10
		YSC-M25-H5-06	4.6-6	25	25-25.4	12	32/32	10
	M32×1.5	YSC-M32-H5-08	6-8	32	32-32.4	12.5	41/41	10
	M40×1.5	YSC-M40-H5-08	6.5-8.3	40	40-40.4	15	50/50	5

Seal Holes	Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
	PG11	YSC-PG11-H5-02	2-2.8	18.6	18.6-18.9	9	22/22	10
	PG16	YSC-PG16-H5-02	1.3-2	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-H5-03	3-3.1	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-H5-04	3-4.1	22.5	22.5-22.8	9.5	26/26	10
	PG21	YSC-PG21-H5-03	2.6-3.6	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H5-04	3.6-4.6	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H5-06	4.6-6	28.3	28.3-28.7	12	32/32	10
	PG29	YSC-PG29-H5-08	6-8	37	37-37.4	12.5	41/41	10
	PG36	YSC-PG36-H5-08	6.5-8.3	47	47-47.4	15	50/50	5
	G(PF)3/8"	YSC-G3/8-H5-02	2-2.8	16.662	16.7-16.9	9	22/22	10
	G(PF)1/2"	YSC-G1/2-H5-02	1.3-2	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-H5-03	3-3.1	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-H5-04	3-4.1	20.955	21-21.2	9.5	26/26	10
	G(PF)3/4"	YSC-G3/4-H5-03	2.6-3.6	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H5-04	3.6-4.6	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H5-06	4.6-6	26.441	26.5-26.8	12	32/32	10
	G(PF)1"	YSC-G1-H5-08	6-8	33.249	33.3-33.6	12.5	41/41	10
	G(PF)1 1/4"	YSC-G1 1/4-H5-08	6.5-8.3	41.91	42-42.3	15	50/50	5
	NPT3/8"	YSC-NPT3/8-H5-02	2-2.8	17.055	-	13	22	10
	NPT1/2"	YSC-NPT1/2-H5-02	1.3-2	21.223	-	13	26	10
		YSC-NPT1/2-H5-03	3-3.1	21.223	-	13	26	10
		YSC-NPT1/2-H5-04	3-4.1	21.223	-	13	26	10
	NPT3/4"	YSC-NPT3/4-H5-03	2.6-3.6	26.568	-	14	32	10
		YSC-NPT3/4-H5-04	3.6-4.6	26.568	-	14	32	10
		YSC-NPT3/4-H5-06	4.6-6	26.568	-	14	32	10
	NPT1"	YSC-NPT1-H5-08	6-8	33.227	-	15	41	10
	NPT1 1/4"	YSC-NPT1 1/4-H5-08	6.5-8.3	41.984	-	15	50	5
	M16×1.5	YSC-M16-H6-02	1.4-2.1	16	16-16.3	9	22/22	10
	M20×1.5	YSC-M20-H6-02	1.3-2	20	20-20.3	9.5	26/26	10
		YSC-M20-H6-03	2-3	20	20-20.3	9.5	26/26	10
	M25×1.5	YSC-M25-H6-03	2.6-3.6	20	20-20.3	9.5	26/26	10
		YSC-M25-H6-05	3.6-5.2	25	25-25.4	12	32/32	10
	M32×1.5	YSC-M32-H6-07	5.6-7	25	25-25.4	12	32/32	10

Seal Holes	Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
	PG11	YSC-PG11-H6-02	1.4-2.1	18.6	18.6-18.9	9	22/22	10
	PG16	YSC-PG16-H6-02	1.3-2	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-H6-03	2-3	22.5	22.5-22.8	9.5	26/26	10
	PG21	YSC-PG21-H6-03	2.6-3.6	28.3	28.-28.7	12	26/26	10
		YSC-PG21-H6-05	3.6-5.2	28.3	28.3-28.7	12	32/32	10
	PG29	YSC-PG29-H6-07	5.6-7	37	37-37.4	12.5	32/32	10
	G(PF)3/8"	YSC-G3/8-H6-02	1.4-2.1	16.662	16.7-16.9	9	22/22	10
	G(PF)1/2"	YSC-G1/2-H6-02	1.3-2	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-H6-03	2-3	20.955	21-21.2	9.5	26/26	10
	G(PF)3/4"	YSC-G3/4-H6-03	2.6-3.6	26.441	26.5-26.8	12	26/26	10
		YSC-G3/4-H6-05	3.6-5.2	26.441	26.5-26.8	12	32/32	10
	G(PF)1"	YSC-G1-H6-07	5.6-7	33.249	33.3-33.6	12.5	32/32	10
	NPT3/8"	YSC-NPT3/8-H6-02	1.4-2.1	17.055	-	13	22	10
	NPT1/2"	YSC-NPT1/2-H6-02	1.3-2	21.223	-	13	26	10
		YSC-NPT1/2-H6-03	2-3	21.223	-	13	26	10
	NPT3/4"	YSC-NPT3/4-H6-03	2.6-3.6	26.568	-	14	26	10
		YSC-NPT3/4-H6-05	3.6-5.2	26.568	-	14	32	10
	NPT1"	YSC-NPT1-H6-07	5.6-7	33.227	-	15	32	10
	M20×1.5	YSC-M20-H7-02	1.3-2	20	20-20.3	9.5	26/26	10
		YSC-M20-H7-03	2-3	20	20-20.3	9.5	26/26	10
	M25×1.5	YSC-M25-H7-03	2.6-3.6	25	25-25.4	12	32/32	10
	M32×1.5	YSC-M32-H7-06	4.6-6	32	32-32.4	12.5	41/41	10
	PG16	YSC-PG16-H7-02	1.3-2	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-H7-03	2-3	22.5	22.5-22.8	9.5	26/26	10
	PG21	YSC-PG21-H6-03	2.6-3.6	28.3	28.3-28.7	12	32/32	10
	PG29	YSC-PG29-H6-06	4.6-6	37	37-37.4	12.5	41/41	10
	G(PF)1/2"	YSC-G1/2-H6-02	1.3-2	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-H6-03	2-3	20.955	21-21.2	9.5	26/26	10
	G(PF)3/4"	YSC-G3/4-H6-03	2.6-3.6	26.441	26.5-26.8	12	32/32	10
	G(PF)1"	YSC-G1-H6-07	4.6-6	33.249	33.3-33.6	12.5	41/41	10
	NPT1/2"	YSC-NPT1/2-H6-02	1.3-2	21.223	-	9.5	26	10
		YSC-NPT1/2-H6-03	2-3	21.223	-	9.5	26	10
	NPT3/4"	YSC-NPT3/4-H6-03	2.6-3.6	26.568	-	12	32	10
	NPT1"	YSC-NPT1-H6-07	4.6-6	33.227	-	12.5	41	10



Multi-Hole Brass Cable Glands

Seal Holes	Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
	M20×1.5	YSC-M20-H8-01	1-1.5	20	20-23.0	9.5	26/26	10
		YSC-M20-H8-02	2-2.8	20	20-23.0	9.5	26/26	10
	M25×1.5	YSC-M25-H8-03	2.6-3.6	25	25-25.4	12	32/32	10
		YSC-M25-H8-04	3-4.1	25	25-25.4	12	32/32	10
		YSC-M25-H8-05	4.5-5.1	25	25-25.4	12	32/32	10
	M32×1.5	YSC-M32-H8-05	4-5.1	32	32-32.4	12.5	41/41	10
		YSC-PG16-H8-01	1-1.5	22.5	22.5-22.8	9.5	26/26	10
	PG16	YSC-PG16-H8-02	2-2.8	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG21-H8-03	2.6-3.6	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-H8-04	3-4.1	28.3	28.3-28.7	12	32/32	10
	PG21	YSC-PG21-H8-05	4.5-5.1	28.3	28.3-28.7	12	32/32	10
		YSC-PG29-H8-05	4-5.1	37	37-37.4	12.5	41/41	10
		YSC-G1/2-H8-01	1-1.5	20.955	21-21.2	9.5	26/26	10
	G(PF)1/2"	YSC-G1/2-H8-02	2-2.8	20.955	21-21.2	9.5	26/26	10
		YSC-G3/4-H8-03	2.6-3.6	26.441	26.5-26.8	12	32/32	10
	G(PF)3/4"	YSC-G3/4-H8-04	3-4.1	26.441	26.5-26.8	12	32/32	10
		YSC-G3/4-H8-05	4.5-5.1	26.441	26.5-26.8	12	32/32	10
		YSC-G1-H8-05	4-5.1	33.249	33.3-33.6	12.5	41/41	10
	NPT1/2"	YSC-NPT1/2-H8-01	1-1.5	21.223	-	13	26	10
		YSC-NPT1/2-H8-02	2-2.8	21.223	-	13	26	10
	NPT3/4"	YSC-NPT3/4-H8-03	2.6-3.6	26.568	-	14	32	10
		YSC-NPT3/4-H8-04	3-4.1	26.568	-	14	32	10
		YSC-NPT3/4-H8-05	4.5-5.1	26.568	-	15	32	10
	NPT1"	YSC-NPT1-H5-05	4-5.1	33.227	-	15	41	10
		YSC-M12-0207	2.3×7.1	12	12-12.3	8	17/17	10
	M16×1.5	YSC-M16-0610	6×10	16	16-16.3	9	22/22	10
	M20×1.5	YSC-M20M-0511	5×11.5	20	20-20.3	9.5	24/24	10
		YSC-M20-0612	6.5×12	20	20-20.3	9.5	26/26	10
		YSC-M20-0614	6×14	20	20-20.3	9.5	26/26	10
		YSC-M20-0712	7×12	20	20-20.3	9.5	26/26	10
		YSC-M20-0714	7×14	20	20-20.3	9.5	26/26	10
	M25×1.5	YSC-M25-0614	6×14	25	25-25.4	12	32/32	10
		YSC-M25-0714	7×14	25	25-25.4	12	32/32	10
	M32×1.5	YSC-M32-0822	8×22	32	32-32.4	12.5	41/41	10
	M40×1.5	YSC-M40-1028	10×28.5	40	40-40.4	15	50/50	5
		YSC-M40-0529	5.5×29	40	40-40.4	15	50/50	5


Multi-Hole Brass Cable Glands



Seal Holes	Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Panel Mounting Hole(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std. Pkg (pcs)
	PG7	YSC-PG7-0207	2.3×7.1	12.5	12.5-12.8	8	17/17	10
	PG9	YSC-PG9-0207	2.3×7.1	15.2	15.2-15.5	8	18/17	10
	PG11	YSC-PG11-0610	6×10	18.3	18.6-18.9	9	22/22	10
	PG13.5	YSC-PG13.5-0511	5×11.5	20.4	20.4-20.7	9.5	24/24	10
	PG16	YSC-PG16-0612	6.5×12	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-0614	6×14	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-0712	7×12	22.5	22.5-22.8	9.5	26/26	10
		YSC-PG16-0714	7×14	22.5	22.5-22.8	9.5	26/26	10
	PG21	YSC-PG21-0614	6×14	28.3	28.3-28.7	12	32/32	10
		YSC-PG21-0714	7×14	28.3	28.3-28.7	12	32/32	10
	PG29	YSC-PG29-0822	8×22	37	37-37.4	12.5	41/41	10
	PG36	YSC-PG36-1028	10×28.5	47	47-47.4	15	50/50	5
		YSC-PG36-0529	5.5×29	47	47-47.4	15	50/50	5
	G(PF)1/4"	YSC-G1/4-0207	2.3×7.1	13.157	13.2-13.4	8	17/17	10
	G(PF)3/8"	YSC-G3/8-0610	6×10	16.662	16.7-16.9	9	22/22	10
	G(PF)1/2"	YSC-G1/2-0612	6.5×12	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-0614	6×14	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-0712	7×12	20.955	21-21.2	9.5	26/26	10
		YSC-G1/2-0714	7×14	20.955	21-21.2	9.5	26/26	10
	G(PF)3/4"	YSC-G3/4-0614	6×14	26.441	26.5-26.5	12	32/32	10
		YSC-G3/4-0714	7×14	26.441	26.5-26.8	12	32/32	10
	G(PF)1"	YSC-G1-0822	8×22	33.249	33.3-33.6	12.5	41/41	10
	G(PF)1 1/4"	YSC-G1 1/4-1028	10×28.5	41.91	42-42.3	15	50/50	5
		YSC-G1 1/4-0529	5.5×29	41.91	42-42.3	15	50/50	5
	NPT3/8"	YSC-NPT3/8-0610	6×10	17.055	-	13	22	10
	NPT1/2"	YSC-NPT1/2-0612	6.5×12	21.223	-	13	26	10
		YSC-NPT1/2-0614	6×14	21.223	-	13	26	10
		YSC-NPT1/2-0712	7×12	21.223	-	13	26	10
		YSC-NPT1/2-0714	7×14	21.223	-	13	26	10
		YSC-NPT3/4-0614	6×14	26.568	-	14	32	10
	NPT3/4"	YSC-NPT3/4-0714	7×14	26.568	-	14	32	10
		YSC-NPT1-0822	8×22	33.227	-	15	41	10
	NPT1"	YSC-NPT1 1/4-1028	10×28.5	41.984	-	15	50	5
		YSC-NPT1 1/4-0529	5.5×29	41.984	-	15	50	5



Metric PG G(PF) NPT




Thread: Metric, PG, G(PF),NPT thread;
Materials: Brass with nickel plated;
Features: To allow switching between different thread outs ide diameter,for example,from large metric external thread to small meteric using.We also ca make as your request for this product.
Note:Special size and type,please contact us.

External thread C3	Internal thread C1	Item No.	Thread Length C2(mm)	Total Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M16×1.5	M12×1.5	YSC-M1612	6.0	8.5	18	10
M20×1.5	M16×1.5	YSC-M2016	6.5	9.0	22	10
M25×1.5	M20×1.5	YSC-M2520	7.0	10.0	30	10
M32×1.5	M25×1.5	YSC-M3225	8.0	11.5	40	10
M40×1.5	M32×1.5	YSC-M4032	9.0	12.5	50	10
M50×1.5	M40×1.5	YSC-M5040	10.0	14.0	59	10
M63×1.5	M50×1.5	YSC-M6350	10.0	14.0	67	10
PG9	PG7	YSC-PG9/7	6.0	8.5	17	10
PG11	PG9	YSC-PG11/9	6.5	8.5	20	10
PG13.5	PG11	YSC-PG13.5/11	6.5	9.0	22	10
PG16	PG13.5	YSC-PG16/13.5	6.5	9.5	24	10
PG21	PG16	YSC-PG21/16	7.5	10.0	30	10
PG29	PG21	YSC-PG29/21	8.0	11.5	39	10
PG36	PG29	YSC-PG36/29	9.0	12.5	50	10
PG42	PG36	YSC-PG42/36	10.0	12.5	50	10
PG48	PG42	YSC-PG48/42	10.0	14.0	57	10
NPT1/2"	NPT3/8"	YSC-NTP1/2-3/8	6.5	9.0	24	10
NPT3/4"	NPT1/2"	YSC-NTP3/4-1/2	7.5	10.0	30	10
NPT1"	NPT3/4"	YSC-NTP1-3/4	8.0	11.5	39	10
NPT1 1/4"	NPT1	YSC-NTP1 1/4-1	9.0	12.5	50	10




Metric PG G(PF) NPT

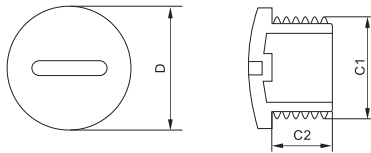

Materials: Brass with nickel plated , EPDM rubber;
Protection degree: IP54、 IP68;
Working temperature: -40℃ to 100℃
Note:Special size and type,please contact us.

Type	Thread O.D C1(mm)	Thread Length C2(mm)	D(mm)
YSC-PG7	12.5	5	14
YSC-PG9	15.2	6	17
YSC-PG11	18.6	6	20
YSC-PG13.5	20.4	6.5	22
YSC-PG16	22.5	6.5	24
YSC-PG21	28.3	7	30
YSC-PG29	37	8	39
YSC-PG36	47	9	50
YSC-PG42	54	10	57
YSC-PG48	59.3	10	64
YSC-M12	12	5	14
YSC-M16	16	6	17
YSC-M18	18	6	20
YSC-M20	20	6.5	22
YSC-M22	22	6.5	24
YSC-M25	25	6.5	27
YSC-M32	32	7	35
YSC-M40	40	8	43
YSC-M50	50	9	55
YSC-M63	63	10	66



Materials: Brass with nickel plated , EPDM rubber;

Protection degree: IP54;

Working temperature: -40°C to 100°C



Application: Stuffing Box Joint is especially for the use of ship to protect the cable;

Note:Special size and type,please contact us.

Item No	Size	Thread	Clamping type	Cable Range (mm)	Thread Length (mm)	Board Dimaeter (mm)
YSC-JT3/8A	YSC-JT-10	3/8"	A	6-7	11	18
YSC-JT3.8B	YSC-JT-10	3/8"	B	7-8	11	18
YSC-JT1/2A	YSC-JT-15	1/2"	A	8-9	11	22
YSC-JT1/2B	YSC-JT-15	1/2"	B	9-10	11	22
YSC-JT1/2C	YSC-JT-15	1/2"	C	10-11	11	22
YSC-JT3/4A	YSC-JT-20	3/4"	A	11-12	11	27
YSC-JT3/4B	YSC-JT-20	3/4"	B	12-13	11	27
YSC-JT3/4C	YSC-JT-20	3/4"	C	12-15	11	27
YSC-JT1A	YSC-JT-25	1"	A	15-16	11	34
YSC-JT1B	YSC-JT-25	1"	B	16-18	11	34
YSC-JT1C	YSC-JT-25	1"	C	16-20	11	34
YSC-JT1 1/4A	YSC-JT-30	1 1/4"	A	20-22	12	43
YSC-JT1 1/4B	YSC-JT-30	1 1/4"	B	22-24	12	43
YSC-JT1 1/4C	YSC-JT-30	1 1/4"	C	22-26	12	43
YSC-JT1 1/2Aa	YSC-JT-35	1 1/2"	A	26-28	12	49
YSC-JT1 1/2Ba	YSC-JT-35	1 1/2"	B	28-30	12	49
YSC-JT1 1/2Ca	YSC-JT-35	1 1/2"	C	26-30	12	49

[illegible]

Metric PG

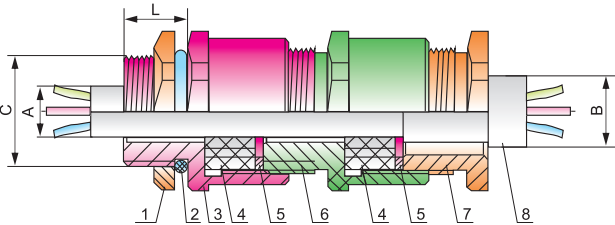

- 1-Nut

2-Sealing ring

3-Entry body

4-Sealing ring
- 5-Washer

6-Middle body

7-Compression nut

8-Cable

Materials: Copper or stainless steel ;

Features: With reliable installation ,good protection and explosion-proof function;

Applications: Isolating gasketing tube in suitable for clamping and fixing steel wire knit of anmour cable,it is cable core
and enclosure gassealing protection must be IP66;

Ex-mark: Exe II is epual to II 2G EXE II(European standard),Exd II is epual to II(European standard);

Use place: Hazardous division 1&2;Explosive gas atmosphere class egas.




Metric	Thread Length (mm)	Sealing range of cable dis.(mm)		Max thickenss of steel braid(mm)		02(mm) Max thickenss of steel braid	The wire diameter (mm)	Max largest (mm)
		A	B	Min	Max			
M20×1.5	12	6.1-12	9.5-17	0.1	0.4	0.9	0.8/1.25	30
M25×1.5	16	11.1-14	18.7-29	0.1	0.71	1.4	1.25/1.6	43
M32×1.5	16	17-21	22.9-35	0.1	0.7	1.4	1.6/2	50
M40×1.5	16	22-28	26-42	0.1	0.8	1.4	16.2	60
M50×1.5	17	29.5-39	35.5-48	0.2	0.63	1.4	2.1/2.5	65
M63×1.5	17	40.1-51	45.6-62	0.2	0.63	1.5	2.5	80
M75×1.5	19	52.8-63	57-74	0.3	0.81	1.5	2.5	92
M100×1.5	19	70-86	76-93	0.3	0.94	1.5	3.15	117

Metric	Thread Length (mm)	Sealing range of cable dis.(mm)		Max thickenss of steel braid(mm)		02(mm) Max thickenss of steel braid	The wire diameter (mm)	Max largest (mm)
		A	B	Min	Max			
G1/2"	12	3.1-8.6	6.1-13.4	0.1	0.4	0.1	0.85	24
G3/4"	12	6.1-11.6	9.5-15.9	0.1	0.1	0.9	0.9/1.25	30
G1"	16	11.1-19.9	18.7-25	0.1	0.7	1.4	1.25/1.6	43
G1 1/4"	16	17-26.2	22.9-30	0.1	0.7	1.4	1.6/2	50
G1 1/2"	16	22-32.1	26-35	0.1	0.8	1.4	1.6/2	60
G2"	17	29.5-38.1	35.5-45	0.2	0.63	1.4	2/2.5	65
G2 1/2"	17	47.2-50	45.6-55	0.2	0.63	1.5	2.5	80
G3"	19	52.8-61.9	57-72.1	0.3	0.81	1.5	2.5	92
G3"	19	59.1-67.9	60.4-78.5	0.3	0.81	1.5	2.5/3.15	92
G4"	19	70-86	76-93	0.3	0.936	1.5	3.15	117



Stainless Steel Cable Glands

Metric PG G(PF) NPT

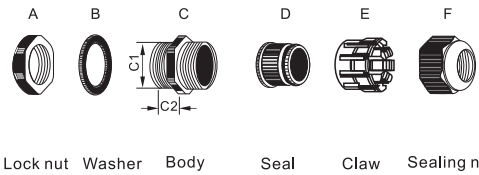

Thread: Metric, PG, G(PF),NPT thread;

Materials: Brass with nickel plated for A,C,F parts,UL approved Nylon PA66 (Flammability UL 94V-2) for E part; EPDM rubber for B, D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C in static state,or instantaneous heat resistance up to 120°C;

Features: The claws and seals of excellent design, sealing nut have a “click”sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency;

Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M6×1	YSC-M3-3	1.5-3	6	6	9/9	20
M8×1.25	YSC-M8-3.8	2-3.8	8	6	12/12	20
M10×1.5	YSC-M10-5.5	2-6.5	10	6.5	14/14	20
M12×1.5	YSC-M12S-5.5	2-6.5	12	7	17/17	20
	YSC-M12-5.5	3-5.5	12	8	17/17	10
	YSC-M12-7.8	4.5-8	12	8	18/18	10
M16×1.5	YSC-M16S-5.5	3-5.5	16	9	22/22	10
	YSC-M16S-7.8	4-4.8	16	9	22/22	10
	YSC-M16-7	4-7	16	9	24/24	10
	YSC-M16-10	6-10	16	9	24/24	10
M20×1.5	YSC-M20S-8.8	4-8.8	20	9.5	26/26	10

Stainless Steel Cable Glands



Thread	Item No.	Cable Range φ (mm)	Thread O.D. C1(mm)	Thread Length C2(mm)	Spanner Size A&F(mm)	Std.Pkg (pcs)
M20×1.5	YSC-M20S-12.5	7-12.5	20	9.5	24/24	10
	YSC-M20-11	7-11	20	9.5	26/26	10
	YSC-M20-13	9-14	20	9.5	26/26	10
M25×1.5	YSC-M25S-11	7-11	25	12	26/26	10
	YSC-M25S-14	9-14	25	12	26/26	10
	YSC-M25-11	12-16	25	12	32/32	10
	YSC-M25-14	14-18	25	12	32/32	10
M32×1.5	YSC-M32-16	16-22	32	12.5	40/40	10
	YSC-M32-18	18-25	32	12.5	40/40	10
M40×1.5	YSC-M40-26	21-26	40	15	50/50	10
	YSC-M40-31	24-31	40	15	50/50	10
M50×1.5	YSC-M50-33	25-33	50	15	60/60	10
	YSC-M50-41	34-41	50	15	60/60	10
M63×1.5	YSC-M63-45	35-45	63	17	70/70	5
PG7	YSC-PG7S-5.5	2-6.5	12.5	7	14/14	10
	YSC-PG7-5.5	3-5.5	12.5	8	17/17	10
	YSC-PG7-7.8	4.5-8	12.5	8	17/17	10
PG9	YSC-PG9-5.5	3-5.5	15.2	8	18/17	10
	YSC-PG9-7.8	4.5-8	15.2	8	18/17	10
PG11	YSC-PG11-7	4-7	18.6	9	22/22	10
	YSC-PG11-10	6-10	18.6	9	22/22	10
PG13.5	YSC-PG13.5-8.8	4-8.8	20.4	9.5	24/24	10
	YSC-PG13.5-12.5	7-12.5	20.4	9.5	24/24	10
PG16	YSC-PG16-11	7-11	22.5	9.5	26/26	10
	YSC-PG16-14	9-14	22.5	9.5	26/26	10
PG21	YSC-PG21-16	12-16	28.3	12	32/32	10
	YSC-PG21-18	14-18	28.3	12	32/32	10
PG29	YSC-PG29-22	16-22	37	12.5	40/40	10
	YSC-PG29-25	18-25	37	12.5	40/40	10
PG36	YSC-PG36-26	21-26	47	15	50/50	10
	YSC-PG36-41	24-31	47	15	50/50	10
PG36	YSC-PG42-33	25-33	54	15	60/60	10
	YSC-PG42-41	31-41	54	15	60/60	10
PG48	YSC-PG48-45	35-45	59.3	17	70/70	5

Metric PG G(PF) NPT




Thread: Metric, PG, G(PF) and NPT thread.
Protection class: flammability:V0 (UL94), and the sealing ring tighten the tight head up to IP65-10Bar
Temperature: -40°C-120°C, short time of up to 150°C
Material: 304,316 stainless steel

Thread	Item No.	Sealing range of cable dia.(mm)		Thread Length L(mm)	thickness of steel braid Min Max		Thickness of wire braid Max(mm)	Max diameter (mm)
M20	EXd-M20-14g	3.1-8.6	6.1-14.0	12	0.1	0.4	0.85	24
	EXd-M20-17g	6-12	9.5-17	12	0.1	0.4	0.9	30
M25	EXd-M25-16g	6.1-11.6	9.5-15.9	12	0.1	0.4	0.9	30
	EXd-M25-29g	11.1-14	18.7-29	16	0.1	0.7	1.4	43
M32	EXd-M32-25g	11.1-19.9	18.7-25	16	0.1	0.7	1.4	43
	EXd-M32-35g	17-21	22.9-35	16	0.1	0.7	1.4	50
M40	EXd-M40-30g	17-26.2	22.9-30	16	0.1	0.7	1.6/2.0	50
	EXd-M40-42g	22-28	26-42	16	0.1	0.8	1.4	60
M50	EXd-M50-35g	22-32.1	26-35	17	0.2	0.8	2.5	60
	EXd-M50-48g	29.5-39	35.5-48	17	0.2	0.63	1.4	65
M63	EXd-M63-45g	29.5-38.1	35.5-45	17	0.2	0.63	2.0/2.5	65
	EXd-M63-45g	40.1-51	45.6-62	17	0.2	0.63	1.5	80

Thread	Item No.	Sealing range of cable dia.(mm)		Thread Length L(mm)	thickness of steel braid Min Max		Thickness of wire braid Max(mm)	Max diameter (mm)
M75	EXd-M75-55g	47.2-50	45.6-55	19	0.3	0.63	2.5	80
	EXd-M75-74g	52.8-63	57-74	19	0.3	0.81	1.5	92
M100	EXd-M100-72g	52.8-61.9	57-72.1	19	0.3	0.81	2.5	92
	EXd-M100-79g	59.1-67.9	60.4-79	19	0.3	0.81	2.5/3.15	92
	EXd-M100-93g	70-86	76-93	19	0.3	0.94	1.6	117
M125	EXd-M125-93g	70-86	76-93	19	0.3	0.936	1.6	117
G1/2"	EXd-G1/2-13g	3.1-8.6	6.1-13.4	12	0.1	0.4	0.85	24
	EXd-G1/2-17g	6-12	9.5-17	12	0.1	0.4	0.9	30
G3/4"	EXd-G3/4-16g	6.1-11.6	9.5-15.9	12	0.1	0.4	0.9	30
	EXd-G3/4-29g	11.1-14	18.7-29	16	0.1	0.7	1.4	43
G 1"	EXd-G1-25g	11.1-19.9	18.7-25	16	0.1	0.7	1.4	43
	EXd-G1-35g	17-21	22.9-35	16	0.1	0.7	1.4	50
G1 1/4"	EXd-G1-1/4-30g	17-26.2	22.9-30	16	0.1	0.7	1.6/2.0	50
	EXd-G1-1/4-42g	22-28	26-42	16	0.1	0.8	1.4	60
G1 1/2"	EXd-G1-1/2-35g	22-32.1	26-35	17	0.2	0.8	2.5	60
	EXd-G1-1/2-48g	29.5-39	35.5-48	17	0.2	0.63	1.4	65
G 2"	EXd-G2-45g	29.5-38.1	35.5-45	17	0.2	0.63	2.0/2.5	65
	EXd-G2-62g	40.1-51	45.6-62	17	0.2	0.63	1.5	80
G2 1/2"	EXd-G2-1/2-55g	47.2-50	45.6-55	19	0.3	0.63	2.5	80
	EXd-G2-1/2-74g	52.8-63	57-74	19	0.3	0.81	1.5	92
G 3"	EXd-G3-72g	52.8-61.9	57-72.1	19	0.3	0.81	2.5	92
	EXd-G3-79g	59.1-67.9	60.4-78.5	19	0.3	0.81	2.5/3.15	92
	EXd-G3-93g	70-86	76-93	19	0.3	0.94	1.6	117
G 4"	EXd-G4-93g	70-86	76-93	19	0.3	0.936	1.6	117
NPT1/2	EXd-NPT1/2-13g	3.1-8.6	6.1-13.4	12	0.1	0.4	0.85	24
	EXd-NPT1/2-17g	6-12	9.5-17	12	0.1	0.4	0.9	30
NPT3/4	EXd-NPT3/4-16g	6.1-11.6	9.5-15.9	12	0.1	0.4	0.9	30
	EXd-NPT3/4-29g	11.1-14	18.7-29	16	0.1	0.7	1.4	43
NPT 1"	EXd-NPT1-25g	11.1-19.9	18.7-25	16	0.1	0.7	1.4	43
	EXd-NPT1-35g	17-21	22.9-35	16	0.1	0.7	1.4	50
NPT1 1/4	EXd-NPT1-1/4-30g	17-26.2	22.9-30	16	0.1	0.7	1.6/2.0	50
	EXd-NPT1-1/4-42g	22-28	26-42	16	0.1	0.8	1.4	60
NPT1 1/2	EXd-NPT1-1/2-35g	22-32.1	26-35	17	0.2	0.8	2.5	60
	EXd-NPT1-1/2-48g	29.5-39	35.5-48	17	0.2	0.63	1.4	65
NPT 2"	EXd-NPT2-45g	29.5-38.1	35.5-45	17	0.2	0.63	2.0/2.5	65
	EXd-NPT2-45g	40.1-51	45.6-62	17	0.2	0.63	1.5	80
NPT2 1/2	EXd-NPT2-1/2-55g	47.2-50	45.6-55	19	0.3	0.63	2.5	80
	EXd-NPT2-1/2-74g	52.8-63	57-74	19	0.3	0.81	1.5	92
NPT 3"	EXd-NPT3-72g	52.8-61.9	57-72.1	19	0.3	0.81	2.5	92
	EXd-NPT3-79g	59.1-67.9	60.4-78.5	19	0.3	0.81	2.5/3.15	92
	EXd-NPT3-93g	70-86	76-93	19	0.3	0.94	1.6	117
NPT 4"	EXd-NPT4-93g	70-86	76-93	19	0.3	0.936	1.6	117

RoHS



Materials: Nylon PA6、Nylon PP ; PA6-V0、 PP(Ploypropylene)-V0

Working temperature: -40°C to 125°C,140°C can be reached but kept only for a short time;

Style:Close and split;

Color:Black(RAL9005),other color available upon request.

Property:Good flexibility,twist resistance and good bending performance,able to bear heavy loads;acid resistant, lubricant resistant and coolant resistant;luster on surface and abrasion resistant;


Load bearing capacity:Able to bear the heavy pressure from treading of feet without cracking or deformation.It can promptly recoil with no damages;

Application:Machinery building,electrical insulating protection,illuminating equipment,automobile manufacturing,flight equipments,metro,trains and automatic control,etc.

Note:Special size and type,please contact us.

Specification	(inch)	Item No.	Inner diameter x Outer diameter	Cured radius	Std.Pkg (pcs)
AD10	1/4	YSC-AD10	6.5 × 10	16	100
AD13	5/16	YSC-AD13	10 × 13	20	100
AD15.8	3/8	YSC-AD15.8	12 × 15.8	30	100
AD18.5	1/2	YSC-AD18.5	14.3 × 18.5	40	100
AD21.2	1/2	YSC-AD21.2	17 × 21.2	45	100
AD25	1/2	YSC-AD25	20 × 25	45	50
AD28.5	3/4	YSC-AD28.5	23 × 28.5	50	50
AD31.5	3/4	YSC-AD31.5	26 × 31.5	55	50
AD34.5	1	YSC-AD34.5	29 × 34.5	60	50
AD42.5	1 1/4	YSC-AD42.5	36 × 42.5	70	25
AD54.5	2	YSC-AD54.5	48 × 54.5	90	25

Metric PG G(PF)

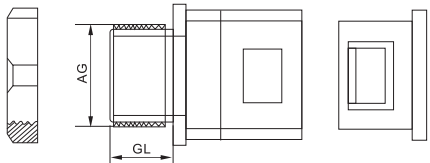

Thread: Metric, PG, G(PF),NPT thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) f

Working temperature: -40°C to 100°C in static state,or instantaneous heat resistance up to 120°C;

Features: The claws and excellent design, to provide a fast & safe connection with the tubing and to get an excellent result of the pull out strength to be the best balanced performers for cable protection system;


Color:Black(RAL9005),grey(RAL7035),other color available upon request.

Note:Special size and type,please contact us.

Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Std.Pkg (pcs)
AD10.0	YSC-M10-10	M10 × 1.5	10	8.5	50
	YSC-M12-10	M12 × 1.5	12	8.5	50
AD13.0	YSC-M12-13	M12 × 1.5	12	10	50
	YSC-M16-13	M16 × 1.5	16	10	50
	YSC-M18-13	M18 × 1.5	18	10	50
AD15.8	YSC-M16-15.8	M16 × 1.5	16	10	50
	YSC-M18-15.5	M18 × 1.5	18	12.5	50
	YSC-M20-15.5	M20 × 1.5	20	12.5	50
AD18.5	YSC-M20-18.5	M20 × 1.5	20	12.5	50
	YSC-M22-18.5	M22 × 1.5	22	12.5	50
AD21.2	YSC-M20-21.2	M20 × 1.5	20	13	50
	YSC-M24-21.2	M24 × 1.5	24	13	50
	YSC-M25-21.2	M25 × 1.5	25	13	50
AD25.0	YSC-M25-25	M25 × 1.5	25	13	50
AD28.5	YSC-M25-28.5	M25 × 1.5	25	13	20



Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Std.Pkg (pcs)
AD28.5	YSC-M27-28.5	M27 × 1.5	27	13	20
	YSC-M30-28.5	M30 × 1.5	30	13	20
	YSC-M32-28.5	M32 × 1.5	32	13	20
AD34.5	YSC-M32-34.5	M32 × 1.5	32	14	10
	YSC-M36-34.5	M36 × 1.5	36	14	10
	YSC-M40-34.5	M40 × 1.5	40	14	10
AD42.5	YSC-M40-42.5	M40 × 1.5	40	15	8
	YSC-M48-42.5	M48 × 1.5	48	15	8
AD54.5	YSC-M50-54.5	M50 × 1.5	50	16	5
	YSC-M63-54.5	M63 × 1.5	63	16	5
AD10	YSC-PG7-10	PG7	12.4	8.5	50
AD13	YSC-PG9-13	PG9	15.2	10	50
AD15.8	YSC-PG11-15.8	PG11	18.4	12.5	50
	YSC-PG13.5-15.8	PG13.5	20.4	12.5	50
AD18.5	YSC-PG13.5-18.5	PG13.5	20.4	12.5	50
AD21.2	YSC-PG16-21.2	PG16	22.5	13	50
AD25	YSC-PG21-25	PG21	28.3	13	20
AD28.5	YSC-PG21-28.5	PG21	28.3	13	20
AD34.5	YSC-PG29-34.5	PG29	37	14	10
AD42.5	YSC-PG36-42.5	PG36	47	15	8
AD54.5	YSC-PG42-54.5	PG42	54	16	5
	YSC-PG48-54.5	PG48	59.3	16	5
AD10	YSC-G1/4-10	G(PF)1/4"	13.1	8.5	50
AD13	YSC-G3/8-13	G(PF)3/8"	16.6	10	50
AD15.8	YSC-G3/8-15.8	G(PF)3/8"	16.6	12.5	50
	YSC-G1/2-15.8	G(PF)1/2"	20.9	12.5	50
AD18.5	YSC-G1/2-18.5	G(PF)1/2"	20.9	12.5	50
AD21.2	YSC-G1/2-21.2	G(PF)1/2"	20.9	13	50
	YSC-G3/4-21.2	G(PF)3/4"	26.4	13	50
AD25	YSC-G3/4-25	G(PF)3/4"	26.4	13	50
AD28.5	YSC-G3/4-28.5	G(PF)3/4"	26.4	13	20
AD34.5	YSC-G1-34.5	G(PF)1"	33.2	14	10
AD42.5	YSC-G1 1/4-42.5	G(PF)1 1/4"	41.9	15	8
AD54.5	YSC-G1 1/2-54.5	G(PF)1 1/2"	48	16	5
	YSC-G2-54.5	G(PF)2"	90	16	5

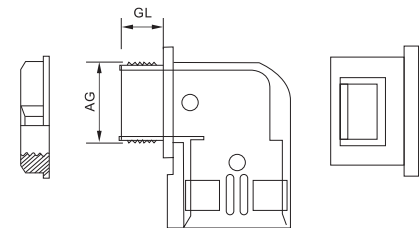

Thread: Metric, PG, G(PF),NPT thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2)

Working temperature: -40℃ to 100℃ in static state,or instantaneous heat resistance up to 120℃;

Features: The claws and excellent design, to provide a fast & safe connection with the tubing and to get an excellent result of the pull out strength to be the best balanced performers for cable protection system;

Color:Black(RAL9005),grey(RAL7035),other color available upon request.

Note:Special size and type,please contact us.

Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Std.Pkg (pcs)
AD10.0	YSC-M10-10	M10 × 1.5	10	10	
	YSC-M12-10	M12 × 1.5	12	10	
AD13.0	YSC-M16-13	M16 × 1.5	16	10	
	YSC-M18-13	M18 × 1.5	18	10	
	YSC-M20-13	M20 × 1.5	20	10	
AD15.8	YSC-M16-15.8	M16 × 1.5	16	10	
	YSC-M18-15.5	M18 × 1.5	18	10	
	YSC-M20-15.5	M20 × 1.5	20	10	
AD18.5	YSC-M20-18.5	M20 × 1.5	20	11.5	
	YSC-M20-21.2	M20 × 1.5	20	13	
AD21.2	YSC-M24-21.2	M24 × 1.5	24	13	
	YSC-M25-21.2	M25 × 1.5	25	13	
AD25.0	YSC-M25-25	M25 × 1.5	25	13	
AD28.5	YSC-M25-28.5	M25 × 1.5	25	13	




Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Std.Pkg (pcs)
AD28.5	YSC-M27-28.5	M27 × 1.5	27	13	
	YSC-M30-28.5	M30 × 1.5	30	13	
AD34.5	YSC-M32-34.5	M32 × 1.5	32	14.5	
	YSC-M36-34.5	M36 × 1.5	36	14.5	
	YSC-M40-34.5	M40 × 1.5	40	14.5	
AD42.5	YSC-M40-42.5	M40 × 1.5	40	14.5	
	YSC-M48-42.5	M48 × 1.5	48	14.5	
AD54.5	YSC-M50-54.5	M50 × 1.5	50	16	
	YSC-M63-54.5	M63 × 1.5	63	16	
AD10	YSC-PG7-10	PG7	12.5	10	
AD13	YSC-PG9-13	PG9	15.2	10	
AD15.8	YSC-PG11-15.8	PG11	18.6	10	
AD18.5	YSC-PG13.5-18.8	PG13.5	20.4	11	
AD21.2	YSC-PG16-21.2	PG16	22.5	13	
AD25	YSC-PG21-25	PG21	28.3	13	
AD28.5	YSC-PG21-28.5	PG21	28.3	13	
AD34.5	YSC-PG29-34.5	PG29	37	14.5	
AD42.5	YSC-PG36-42.5	PG36	47	14.5	
AD54.5	YSC-PG42-54.5	PG42	54	16	
	YSC-PG48-54.5	PG48	59.3	16	
AD10	YSC-G1/4-10	G(PF)1/4"	13.157	10	
AD13	YSC-G3/8-13	G(PF)3/8"	16.662	10	
AD15.8	YSC-G1/2-15.8	G(PF)1/2"	20.955	10	
AD18.5	YSC-G1/2-18.5	G(PF)1/2"	20.955	11	
AD21.2	YSC-G1/2-21.2	G(PF)1/2"	20.9	13	
AD25	YSC-G3/4-25	G(PF)3/4"	26.441	13	
AD28.5	YSC-G3/4-28.5	G(PF)3/4"	26.441	13	
AD34.5	YSC-G1-34.5	G(PF)1"	33.2	14.5	
AD42.5	YSC-G1 1/4-42.5	G(PF)1 1/4"	41.9	14.5	
AD54.5	YSC-G1 1/2-54.5	G(PF)1 1/2"	48	16	
	YSC-G2-54.5	G(PF)2"	90	16	



Metric PG G(PF)

A B C D F
Lock nut Washer Body Seal Sealing nut

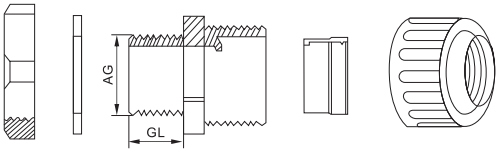


Thread: Metric, PG, G(PF),NPT thread;
Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A,C,F part; Weather-resistant EPDM rubber for B, D parts, (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);
Protection degree: IP68-10 Bar;
Working temperature: -40°C to 100°C;
Features: The powerful watertight fittings build the best tightening power by a very high and active compression force of high pressure water jet form any angle which can provide 100% dinamic waterproof and airtight performance over the widest range of corrugated tubings.
Color:Black(RAL9005),grey(RAL7035),other color available upon request.
Note:Special size and type,please contact us.

Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Std.Pkg (pcs)
AD10.0	YSC-M10-10	M10 × 1.5	10	9	50
	YSC-M12-10	M12 × 1.5	12	9	50
	YSC-M16-10-ST	M16 × 1.5	16	10	50
AD13.0	YSC-M16-13-ST	M16 × 1.5	16	10	50
	YSC-M16-13	M16 × 1.5	16	15	50
AD15.8	YSC-M16-15.8-ST	M16 × 1.5	16	10	50
	YSC-M16-15.8	M16 × 1.5	16	15	50
	YSC-M20-15.8-ST	M20 × 1.5	20	10	50
	YSC-M20-15.8	M20 × 1.5	20	15	50
	YSC-M22-15.8-ST	M22 × 1.5	22	10	50

Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Std.Pkg (pcs)
AD15.8	YSC-M22-15.8	M22×1.5	22	15	50
	YSC-M25-15.8-ST	M25×1.5	25	12	50
AD18.5	YSC-M16-18.5-ST	M16×1.5	16	10	50
	YSC-M16-18.5	M16×1.5	16	15	50
	YSC-M20-18.5-ST	M20×1.5	20	10	50
	YSC-M20-18.5	M20×1.5	20	15	50
	YSC-M22-18.5-ST	M22×1.5	22	10	50
	YSC-M22-18.5	M22×1.5	22	15	50
	YSC-M25-18.5-ST	M25×1.5	25	12	50
AD21.2	YSC-M20-21.2-ST	M20×1.5	20	10	50
	YSC-M20-21.2	M20×1.5	20	15	50
	YSC-M25-21.2-ST	M25×1.5	25	10	50
	YSC-M25-21.2	M25×1.5	25	15	50
AD25	YSC-M20-25-ST	M20×1.5	20	10	50
	YSC-M20-25	M20×1.5	20	15	50
	YSC-M25-25-ST	M25×1.5	25	10	50
	YSC-M25-25	M25×1.5	25	15	50
AD26.2	YSC-M20-26.2-ST	M20×1.5	20	10	50
	YSC-M20-26.2	M20×1.5	20	15	50
	YSC-M25-26.2-ST	M25×1.5	25	10	50
	YSC-M25-26.2	M25×1.5	25	15	50
AD28.5	YSC-M25-28.5-ST	M25×1.5	25	10	50
	YSC-M25-28.5	M25×1.5	25	15	50
AD34.5	YSC-M32-34.5-ST	M32×1.5	32	10	20
	YSC-M32-34.5	M32×1.5	32	15	20
AD42.5	YSC-M40-42.5	M40×1.5	40	15	10
	YSC-M50-42.5	M50×1.5	50	15	10
AD48.5	YSC-M50-48.5	M50×1.5	50	15	10
AD54.5	YSC-M50-54.5	M50×1.5	50	22	10
	YSC-M63-54.5	M63×1.5	63	25	10
AD10.0	YSC-PG7-10	PG7	12.5	9	50
	YSC-PG9-10	PG9	15.2	9	50
AD13.0	YSC-PG11-13	PG11	18.6	10	50
AD15.8	YSC-PG13.5-15.8	PG13.5	20.4	10	50
	YSC-PG16-15.8	PG16	22.5	10.8	50

[illegible]

Metric

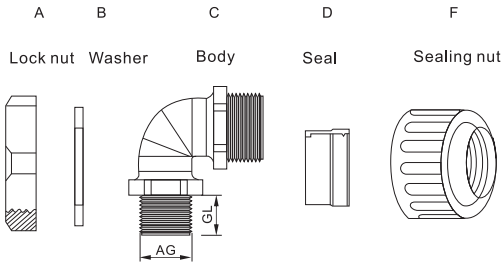

Thread: Metric, PG, G(PF),NPT thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A,C,F part; Weather-resistant EPDM rubber for B. D parts, (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc);

Protection degree: IP68-10 Bar;

Working temperature: -40°C to 100°C;


Features: The powerful watertight fittings build the best tightening power by a very high and active compression force of high pressure water jet form any angle which can provide 100% dinamic waterproof and airtight performance over the widest range of corrugated tubings.

Color:Black(RAL9005),grey(RAL7035),other color available upon request.

Note:Special size and type,please contact us.

Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Body Min L.D.(mm)	Std.Pkg (pcs)
AD13.0	YSC-M16-13-ST	M16×1.5	16	10	10.7	50
AD15.8	YSC-M16-15.8-ST	M16×1.5	16	10	11.1	50
	YSC-M16-15.8	M16×1.5	16	15	11	50
	YSC-M20-15.8-ST	M20×1.5	20	10	14.7	50
AD18.5	YSC-M20-15.8	M20×1.5	20	15	14.7	50
	YSC-M16-18.5-ST	M16×1.5	16	10	11	50
	YSC-M16-18.5	M16×1.5	16	15	11	50
	YSC-M20-18.5-ST	M20×1.5	20	10	14.7	50
	YSC-M20-18.5	M20×1.5	20	15	14.7	50
AD21.2	YSC-M25-21.2-ST	M25×1.5	25	10	14.8	50
	YSC-M25-21.2	M25×1.5	25	15	14.8	50
AD25	YSC-M25-25-ST	M25×1.5	25	10	19.2	50
	YSC-M25-25	M25×1.5	25	15	19.2	50
AD28.5	YSC-M25-28.5-ST	M25×1.5	25	10	19.9	50
	YSC-M25-28.5	M25×1.5	25	15	19.9	50
AD34.5	YSC-M32-34.5	M32×1.5	32	15	26.2	20
AD42.5	YSC-M40-42.5	M40×1.5	40	20	34	10

Metric PG G(PF)

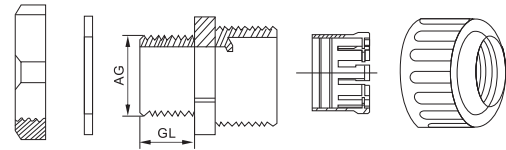

Thread: Metric, PG, G(PF),NPT thread;

Materials: UL approved Nylon PA66 (Flammability UL 94V-2)

Protection degree: IP65;

Working temperature: -40°C to 100°C;

Features: The powerful watertight fittings build the best tightening power by a very high and active compression force of high pressure water jet form any angle which can provide 100% dinamic waterproof and airtight performance over the widest range of corrugated tubings.

Color:Black(RAL9005),grey(RAL7035),other color available upon request.


Note:Special size and type,please contact us.

Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Std.Pkg (pcs)
AD10.0	YSC-M12-10	M12×1.5	12	9	50
	YSC-M16-10-ST	M16×1.5	16	10	50
AD13.0	YSC-M16-13-ST	M16×1.5	16	10	50
	YSC-M16-13	M16×1.5	16	15	50
AD15.8	YSC-M16-15.8-ST	M16×1.5	16	10	50
	YSC-M16-15.8	M16×1.5	16	15	50
	YSC-M20-15.8-ST	M20×1.5	20	10	50
	YSC-M20-15.8	M20×1.5	20	15	50
	YSC-M22-15.8-ST	M22×1.5	22	10	50
	YSC-M22-15.8	M22×1.5	22	15	50
AD18.5	YSC-M25-15.8-ST	M25×1.5	25	12	50
	YSC-M16-18.5-ST	M16×1.5	20	10	50
	YSC-M16-18.5	M16×1.5	22	15	50
AD18.5	YSC-M16-18.5	M16×1.5	22	15	50
	YSC-M20-18.5-ST	M20×1.5	22	10	50



Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Std.Pkg (pcs)
AD18.5	YSC-M20-18.5	M20×1.5	20	15	50
	YSC-M22-18.5-ST	M22×1.5	22	10	50
	YSC-M22-18.5	M22×1.5	22	15	50
	YSC-M25-18.5-ST	M25×1.5	25	12	50
AD21.2	YSC-M20-21.2-ST	M20×1.5	20	10	50
	YSC-M20-21.2	M20×1.5	20	15	50
	YSC-M25-21.2-ST	M25×1.5	25	10	50
	YSC-M25-21.2	M25×1.5	25	15	50
AD25	YSC-M25-25-ST	M25×1.5	25	10	50
	YSC-M25-25	M25×1.5	25	15	50
AD28.5	YSC-M25-28.5-ST	M25×1.5	25	10	50
	YSC-M25-28.5	M25×1.5	25	15	50
AD34.5	YSC-M32-34.5-ST	M32×1.5	32	10	20
	YSC-M32-34.5	M32×1.5	32	15	20
AD42.5	YSC-M40-42.5	M40×1.5	40	15	10
	YSC-M50-42.5	M50×1.5	50	15	10
AD48.5	YSC-M50-48.5	M50×1.5	50	15	10
AD54.5	YSC-M50-54.5	M50×1.5	50	22	10
	YSC-M63-54.5	M63×1.5	63	25	10
AD10.0	YSC-PG7-10	PG7	12.5	9	50
	YSC-PG9-10	PG9	15.2	9	50
AD13.0	YSC-PG11-13	PG11	18.6	10	50
AD15.8	YSC-PG13.5-15.8	PG13.5	20.4	10	50
	YSC-PG16-15.8	PG16	22.5	10.8	50
AD18.5	YSC-PG13.5-18.5	PG13.5	20.4	10	50
	YSC-PG16-18.5	PG16	22.5	10.8	50
AD21.2	YSC-PG16-21.2	PG16	22.5	13	50
	YSC-PG21-21.2	PG21	28.3	13	50
AD28.5	YSC-PG21-28.5	PG21	28.3	13	50
AD34.5	YSC-PG29-34.5	PG29	37	13	20
AD42.5	YSC-PG36-42.5	PG36	47	13	10
AD54.5	YSC-PG48-54.5	PG48	59.3	16	10
AD10.0	YSC-G1/4-10	G(PF)1/4"	13.1	9	50
AD13.0	YSC-G3/8-13	G(PF)3/8"	16.6	15	50
AD15.8	YSC-G1/2-15.8	G(PF)1/2"	20.9	15	20
AD18.5	YSC-G1/2-18.5	G(PF)1/2"	20.9	15	20
AD21.2	YSC-G1/2-21.2	G(PF)1/2"	20.9	15	20
	YSC-G3/4-21.2	G(PF)3/4"	26.4	15	50
AD28.5	YSC-G3/4-28.5	G(PF)3/4"	26.4	15	50
AD34.5	YSC-G1-34.5	G(PF)1"	33.2	15	20
AD42.5	YSC-G1 1/4-42.5	G(PF)1 1/4"	41.9	15	10
AD54.5	YSC-G1 1/2-54.5	G(PF)1 1/2"	48	15	10
	YSC-G2-54.5	G(PF)2"	60	15	10

Bracket for Plastic Flexible Conduit

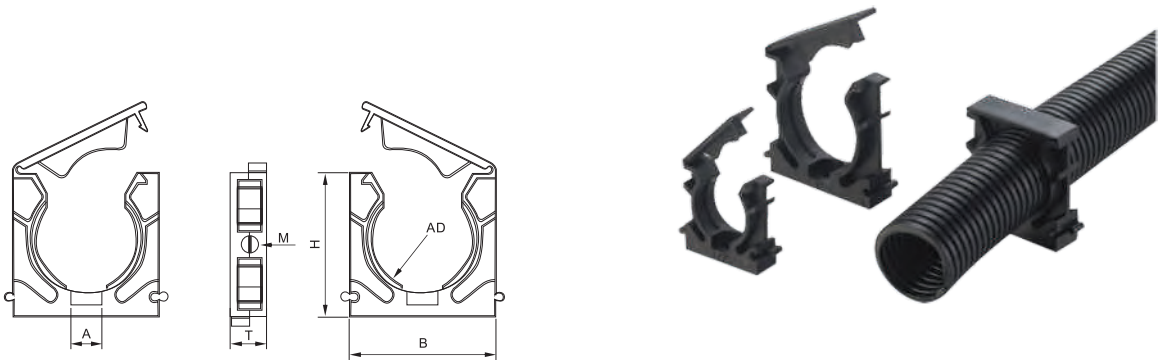

Materials: Nylon PA66(Polyamide)

Working temperature: -40°C to 110°C;

Color:Black(RAL9005),other color available upon request.

Application:

Note:Special size and type,please contact us.

型号 Type	适配软管规格 Accommodated Pipes		H(mm)	B(mm)	T(mm)	M(mm)	A(mm)
YSC-ZJ-10	AD10	1/4	30	23	12.5	4	6.5
YSC-ZJ-13	AD13	5/16	30	23	12.5	4	6.5
YSC-ZJ-15.8	AD15.8	3/8	30	23	12.5	4	6.5
YSC-ZJ-18.5	AD18.5		35	30	15	5	6.5
YSC-ZJ-21.2	AD21.2	1/2	35	30	15	5	6.5
YSC-ZJ-25	AD25		35	30	15	5	6.5
YSC-ZJ-28.5	AD28.5	3/4	45	38	16	6	11.5
YSC-ZJ-34.5	AD34.5	1	51	43	16	6	11.5
YSC-ZJ-42.5	AD42.5	1 1/4	61	51	16	6	11.5
YSC-ZJ-54.5	AD54.5	2	74	64	20	6	11.5



Metric



Materials:Its core consists of hot dipped galvanized steel,external covered with a layer of PVC;
Color:Black(RAL9005),Gray(RAL7035);
Working temperature: -25°C to 60°C;
Protection level:IP68;
Using method:Inserting the wire or calbe into the conduit and the equipped with the metal flexible connector;
Application:Protect the cable;waterproof.
Note:Special size and type,please contact us.


Metric system	G System	Min	Max	Min	Max	Std.Pkg (pcs)
φ 10	5/16"	9.9	10.2	13	13.3	50
φ 12	3/8"	12.3	12.6	15.4	15.7	50
φ 13		13.3	13.6	15.4	15.7	50
φ 15		14.5	14.8	17.4	17.7	50
φ 16	1/2"	15.5	15.8	19.4	19.7	50
φ 20	3/4"	20.4	20.7	24.4	24.7	50
φ 25	1"	25.5	26	29.6	30.1	50
φ 32	1 1/4"	32.7	33.2	37.7	38.2	25
φ 38	1 1/2"	38.5	39	44.7	45.2	25
φ 51	2"	50.5	51	58.2	58.7	20
φ 64	2 1/2"	62.3	63	70.3	71	10
φ 75	3"	74.4	74.9	83.3	83.8	10
φ 100	4"	97.5	98.5	108.5	108.8	10



Metric


PG

G(PF)

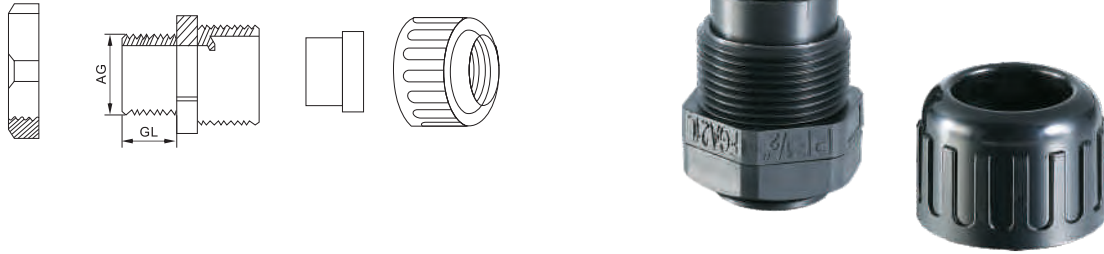

Thread:Metric ,PG, G(PF) ;
Materials:UL approved Nylon PA66(Flammability UL 94V-2);
Working temperature: -40°C to 100°C;
Color:Black(RAL9005),Gray(RAL7035);
Application:Connect metal flexible conduit to provide strong pull-out strength and anti-vibration function,waterproof;
Note:Special size and type,please contact us.

Accommodated Pipes	Item No.	Thread	Thread O.D. C1(mm)	Thread Length C2(mm)	Std.Pkg (pcs)
5/16"管	YSC-M16-AD15.8-ST	M16×1.5	16	10	50
	YSC-M16-AD15.8	M16×1.5	16	15	50
3/8"管	YSC-M16-AD15.8-ST	M16×1.5	16	10	50
	YSC-M16-AD15.8	M16×1.5	16	15	50
1/2"管	YSC-M20-AD21.2-ST	M20×1.5	20	10	50
	YSC-M20-AD21.2	M20×1.5	20	15	50
3/4"管	YSC-M25-AD21.2-ST	M25×1.5	25	10	50
	YSC-M25-AD21.2	M25×1.5	25	15	50
1"管	YSC-M32-AD34.5-ST	M32×1.5	32	10	20
	YSC-M32-AD34.5	M32×1.5	32	15	20
1 1/4"管	YSC-M40-AD42.5	M40×1.5	40	15	10
1 1/2"管	YSC-M50-AD48	M50×1.5	50	15	10
2"管	YSC-M63-AD54.5	M63×1.5	63	25	50
5/16"管	YSC-PG16-15.8	PG16"	22.5	10.8	50
3/8"管	YSC-PG16-15.8	PG16"	22.5	10.8	50
1/2"管	YSC-PG16-21.2	PG16"	22.5	13	50
3/4"管	YSC-PG21-28.5	PG21"	28.3	13	50
1"管	YSC-PG29-34.5	PG29"	37	13	50
5/16"管	YSC-PF1/2-15.8	PF1/2"	20.9	15	50
3/8"管	YSC-PF1/2-18.5	PF1/2"	20.9	15	50
1/2"管	YSC-PF1/2-21.2	PF1/2"	20.9	15	20
3/4"管	YSC-PF3/4-28.5	PF3/4"	26.4	15	20
1"管	YSC-PF1-34.5	PF1"	33.2	15	10
1 1/4"管	YSC-PF1 1/4-42.5	PF1 1/4"	41.9	15	10
1 1/2"管	YSC-PF1 1/2-48	PF1 1/2"	48	15	
2"管	YSC-PF2-54.5	PF2"	60	15	



Materials: UL approved halogen-free Nylon PA66 flammability UL 94V-2

Color:Black(RAL9005),Gray(RAL7035),other color available upon request.

Application:The nylon ferrules are designed to protect cables from contacting the sharp edged conduit;

Note:Special size and type,please contact us.

Item.No.	Accommodated Pipes	A(mm)	B1(mm)	B2(mm)	C(mm)
YSC-5/16	5/16"	9.2	20	20.5	20
YSC-3/8	3/8"	10.8	20	20.5	21
YSC-1/2	1/2"	14.2	25	26	24
YSC-3/4	3/4"	18	30.5	31.5	26
YSC-1	1"	23.5	36	38	31
YSC-1 1/4	1 1/4"	32.5	45	40	33
YSC-1 1/2	1 1/2"	37	52	53	36
YSC-2	2"	49	64.5	65	35