

螺旋式压线帽

- 材质: 采用UL认可尼龙66料制成, 内部备有弹簧。
- 使用方法: 将电线尾部外皮剥去, 将所要接的电线同时插入扭紧即可。

Screw on wire connectors

- Material: UL Nylon 66, with spring inside.
- Usage: peel wire coat, insert the wire in, then tighten.

编号 ITEM.NO.	高(H) (mm)	宽(W) (mm)	内径(D) (mm)	适用电线 SUITABLE WIRES	颜色 COLOR
CHS-P71	15	8.5	6.5	MIN#20×1+ #22×1 MAX#16×2	灰 Grey
CHS-P72	18	10	7.5	MIN#20×3 MAX#16×3	兰 Blue
CHS-P73	20	11.5	9.5	MIN#20×3 MAX#16×3+ #18×1	橘红 Orange
CHS-P74	23.5	13.5	10.8	MIN#14×1+ #18×1 MAX#14×4+ #18×1	黄 Yellow
CHS-P75	23.5	15.5	12.7	MIN#14×2 MAX#10×2+ #12×2	红 Red


双翼螺旋式压线帽

- 材质: 采用UL认可尼龙66料制成, 内部备有弹簧。
- 使用方法: 将电线尾部外皮剥去, 将所要接的电线同时插入扭紧即可。
- 特点: 外型设有扭转翼, 使操作省力轻便, 易于将电线固定。


Double wings screw on wire connectors

- Material: UL Nylon 66, with spring inside.
- Usage: peel wire coat, insert the wire in, then tighten.

编号 ITEM.NO.	高(H) (mm)	宽(W) (mm)	内径(D) (mm)	适用电线 SUITABLE WIRES	颜色 Color
CHS-P1	22.0	19.0	12.5	MIN#18×2 MAX#12×3	黄 Yellow
CHS-P2	28.0	22.0	15.0	MIN#14×2 MAX#10×4	红 Red



(P71-P75)



(P1-P2)



编 号 ITEM.NO.	高(H) (mm)	宽(W) (mm)	内径(D) (mm)	适用电线 SUITABLE WIRES	颜色 COLOR
CHS-N71	15	8.5	6.5	MIN#20×1+ #22×1 MAX#16×2	灰 Grey
CHS-N72	18	10	7.5	MIN#20×3 MAX#16×3	兰 Blue
CHS-N73	20	11.5	9.5	MIN#20×3 MAX#16×3+ #18×1	橘红 Orange
CHS-N74	23.5	13.5	10.8	MIN#14×1+ #18×1 MAX#14×4+ #18×1	黄 Yellow
CHS-N75	23.5	15.5	12.7	MIN#14×2 MAX#10×2+ #12×2	红 Red



安全型压线帽




Underwriters
Laboratories Inc.
File E 312853

- 外壳材质: UL认可之尼龙66, 防火等级94V-2。
- 使用方法: 将电线尾部外皮剥去再插入套管内, 用压线钳压紧即可。
- 特点: 外壳为尼龙注塑成型、内部铜管特长, 增加电线压接范围使其更易于导电, 并更能夹住电线, 即使强烈振动亦不脱落。

Safety-type wire joints

- Shell material: Nylon 66, 94V-2, certificated agree, by UL.
- Usage: Peel the coat of wire, then insert to tube, use pincers to fix them.
- Feature: Nylon shell, long copper tube, easy to conduct electricity and hold wire tightly.

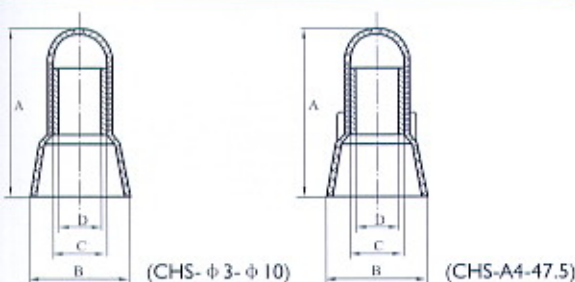

编 号 ITEM.NO.	A(高) (mm)	W(宽)		铜管内径 D (mm)	适用电线范围 SUITABLE WIRES	
		B (mm)	C (mm)		mm ²	AWG
CHS-φ3	18	9	3.6	2.8	1.25	22-16
CHS-φ4	21	9.5	3.9	3	2	16-14
CHS-φ5	22.5	10.5	4.8	4	5.5	12-10
CHS-φ6	24	12	5.6	4.8	8	8
CHS-φ7	25.5	13	6.5	5.5	10	8-6
CHS-φ8	25.5	14	7.5	6	13	6
CHS-φ10	29.5	15.5	9.3	7.8	16	4

定位型压线帽

Safety-type wire joints


- 用法如同安全型压线帽
- 加定位点, 接线更牢固



编 号 ITEM.NO.	A(高) (mm)	W(宽)		铜管内径 D (mm)	适用电线范围 SUITABLE WIRES	
		B (mm)	C (mm)		mm ²	AWG
CHS-A4	20	9.0	2.8	4.0	1.25	22-16
CHS-A5	21	10.2	3.6	5.0	2	16-14
CHS-A5.5	25	11.5	3.9	5.5	5.5	12-10
CHS-A6	26.5	12.8	4.5	6.1	8	8
CHS-A7.5	28	14.4	5.5	7.5	10	8-6

快速连接器

Quick wire connectors

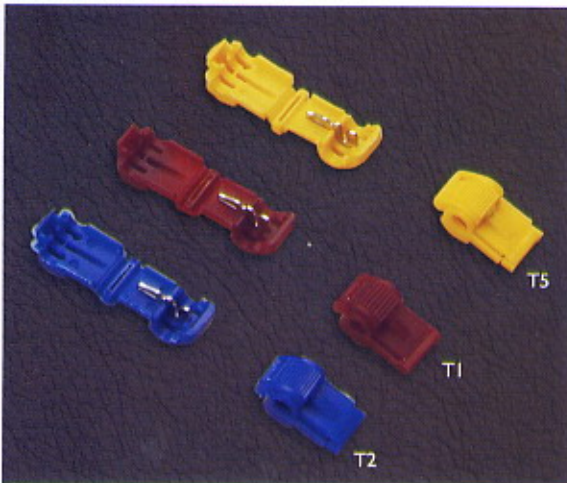


编号 ITEM.No.	导线截面 A.W.G mm ²	颜色 COLOR
T1	22-18A.W.G 0.5-1.0mm ²	红 Red
T2	20-16A.W.G 0.75-1.5mm ²	蓝 Blue
T5	18-14A.W.G 1.0-2.5mm ²	黄 Yellow




快速连接器

Quick wire connectors



编号 ITEM.No.	尺寸 W (mm)	DIMENSION L (mm)	导线截面 A.W.G mm ²	颜色 COLOR
KW-3	20.0	27.0	22-18 A.W.G 0.5-1.0mm ²	红 Red
KW-4	20.0	27.0	18-14 A.W.G 1.0-2.5mm ²	蓝 Blue
KW-5	20.5	34.5	12-10 A.W.G 4-6mm ²	黄 Yellow
KW-6	-	-	22-20 A.W.G 0.5-0.75mm ²	红 Red

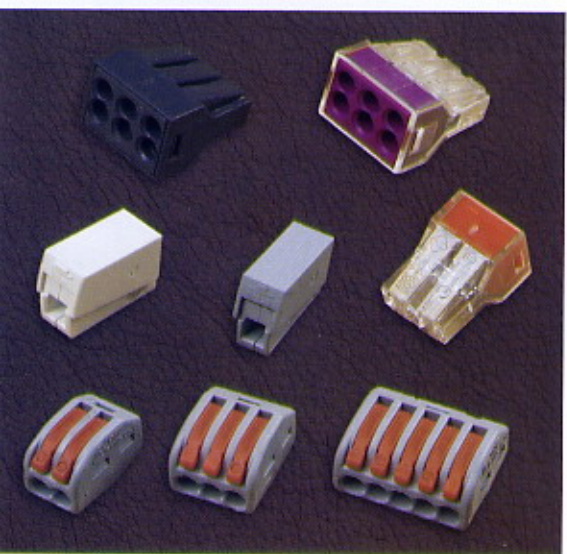

本公司热忱欢迎新老客户来样,来图或来模委托加工各种连接器。

We welcome OEM orders for wire connectors by samples, drawing or molds.

- 来样、来图或来模不得涉及任何专利问题
- The OEM orders for wire connectors by samples, drawing or molds shouldn't involve in the infringement of patent.
- 左图仅供参考
- All pictures here are for reference only.


自粘式定位片

- 材质: 采用UL认可之尼龙66料制成, 防火等级94V-2. 背附进口双面海棉胶, 绝缘性能良好、耐久性、不易老化。
- 使用方法: 将定位片海棉胶撕开, 贴于机板固定, 再用扎带捆扎电线。
- 用途: 省时、简便, 供面板不可以钻孔时使用。

Self-adhesive tie mounts

- Material: Nylon 66, 94V-2, certificated by UL, the back attached sponge glue imported.
- Usage: Peel the sponge glue and stick on the wall then, bundle the wire with cable ties.
- Application: for bundling wires and other things save time and convenient, used for the wall which can't be made a hole in.



编号 ITEM.NO.	长×宽 L×W	高(H) (mm)	T (mm)	螺丝孔 SCREW HOLE(mm)
TM-20	20×20	6.1	5.0	2.9
TM-25	25×25	7.5	6.2	3.5
TM-30	30×30	8.7	6.4	4.5
TM-40	40×40	6.4	10.8	/
AAM-1	19×19	4.6	4.4	/
AAM-2	28×28	6.4	5.4	5.5

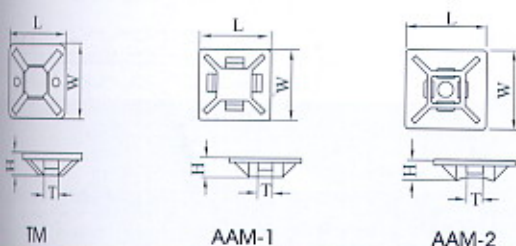


自粘式定位线夹 Self-adhesive tie mounts

- Material: Nylon 66, (C-1; C-2), certificated by UL, high grade steel or stainless steel; sponge double side sticker.
- Usage: remove the sticker protect paper, stick the clip on the wall, then put the wire through the clip.
- Character: convenient for use, it is especial suit for the no-holes of wall.

编号 ITEM.NO.	长×宽 L×W	材料 MATERIAL	背胶
C-1	17×12	PA66	3M
C-2	20×14	PA66	3M
CB-3	20×10	Steel	3M
CB-4	25×15		3M
CB-5	30×20		3M

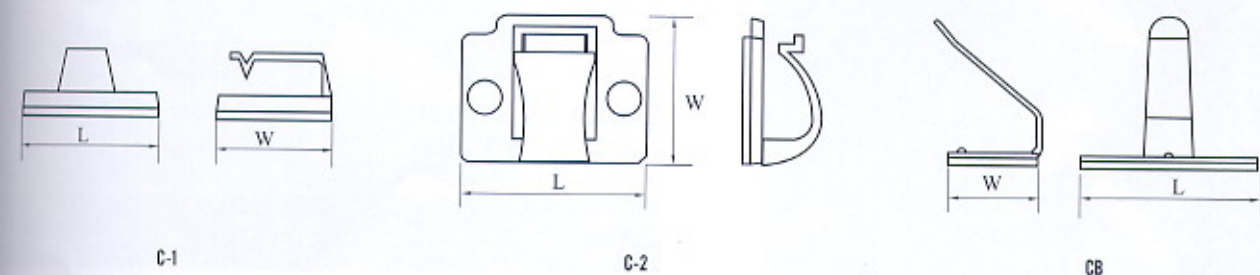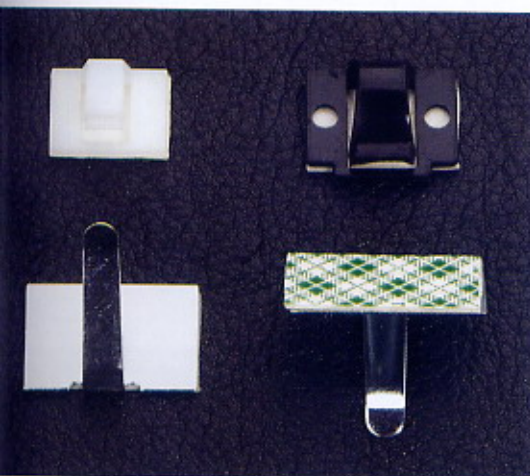

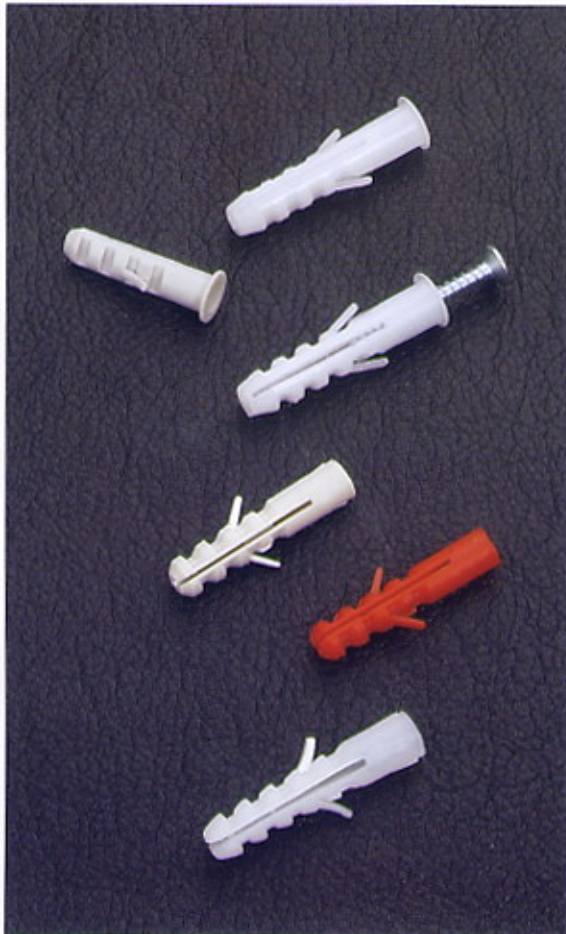


膨胀管

- 材质: 采用PE料制成。
- 颜色: 白、灰

Expand Plugs

- Material: made of PE.
- Color: White、Grey.

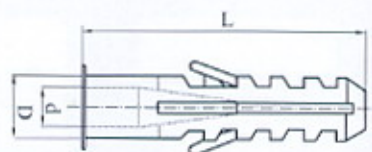


编号 ITEM.NO.	长(L) (mm)	外径(D) (mm)	内径(d) (mm)	螺丝钉 SCREW (mm)
EN-06	29.8	6.0	4.9	Φ4×32
EN-07	29.8	7.0	5.3	Φ5×32
EN-08	39.2	8.0	5.3	Φ5×40
EN-10	44.0	9.9	5.8	Φ5×45
EN-12	48.3	11.6	6.3	Φ6×50

RT型膨胀管

- 材质: 采用PE料制成。
- 颜色: 白、灰、彩色

RT Expand Plugs

- Material: made of PE.
- Color: White、Grey、Color.



编号 ITEM.NO.	长(L) (mm)	外径(D) (mm)	内径(d) (mm)	螺丝钉 SCREW (mm)
RT-07	35.0	7.0	5.7	Φ4×37
RT-08	40.0	8.0	6.7	Φ5×42
RT-10	50.0	10.0	8.5	Φ6×53
RT-12	60.0	12.0	10.4	Φ7×63



长型膨胀管

- 材质: 采用PE料制成。
- 颜色: 白、灰

Expand Plugs

- Material: made of PE.
- Color: White、Grey.


编号 ITEM.NO.	长(L) (mm)	外径(D) (mm)	内径(d) (mm)	螺丝钉 SCREW (mm)
EN-08L	78.0	8.0	6.0	Φ5.5×85
EN-10L	99.0	10.0	7.5	Φ7.0×102

扎带固定座


- 材质: 采用PA料制成。
- 颜色: 白、黑

Cable tie holder

- Material: made of PA.
- Color: White、Black.




编号 ITEM.NO.	A	B	H1	H2	外径(D) (mm)
CTH-1	10	14.8	40.2	5.9	10

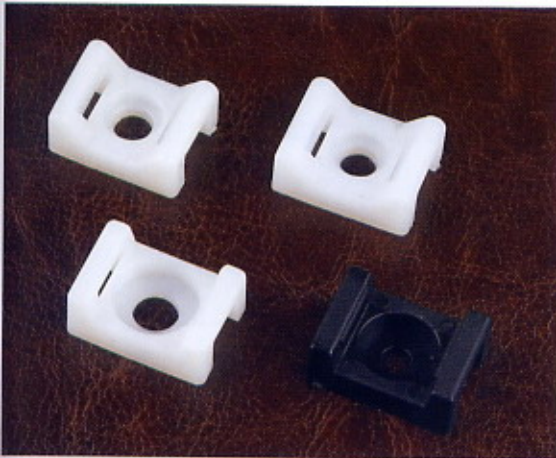


扎带固定座 Cable tie holder


编 号 ITEM.NO.	H	L	W	孔 径 D
CTH-2A	9.5	22	16	4.5
CTH-2B	9.5	22	16	6.8
CTH-2C	9.5	22	16.5	5.8




CTH-2A



CTH-2B




CTH-2C

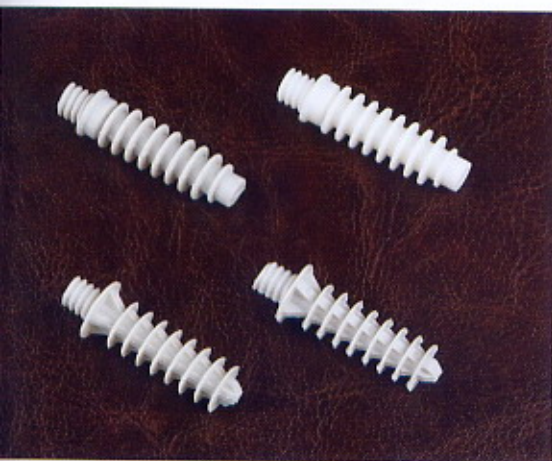


扎带固定头 Cable tie holder


编 号 ITEM.NO.	L	LI	A	孔 径 D
CTH-3A	38	6	10	M7×1.5
CTH-3B	39	7	10	M6×1.5



CTH-3A





CTH-3B

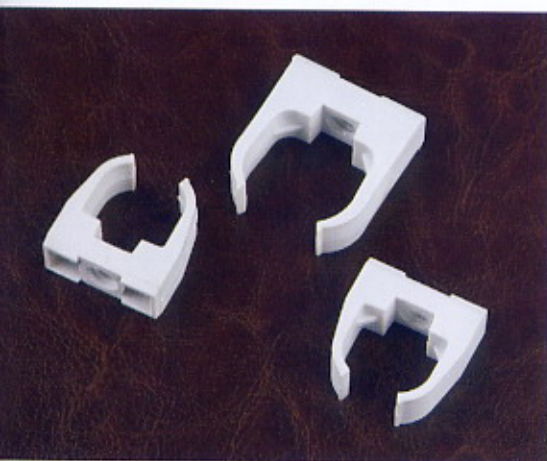


马鞍型管夹 Saddle Type Clip

编 号 ITEM.NO.	A	B	H	+ CTH-3A
SCP-16	16	22	26	ECP-16
SCP-20	20	26	28	ECP-20
SCP-25	25	30	35	ECP-25





ECP

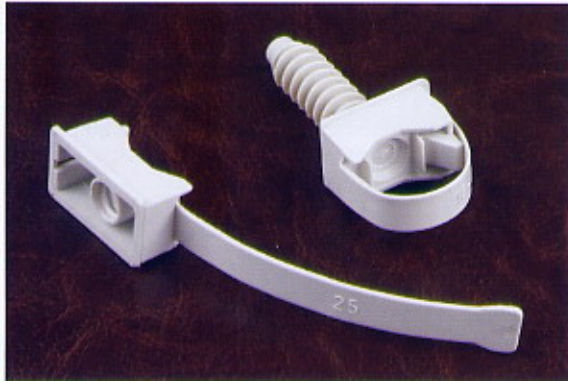


固定锁式管夹 Saddle Mounting Clip

编 号 ITEM.NO.	A	B	L	卡管直径
SMT-1	15.4	12.4	74	16/20
SMT-2	15.4	12.4	90	25

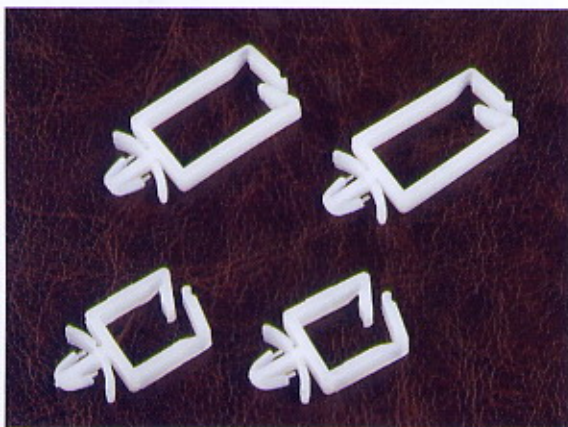

马鞍型线夹 Sq wire holder

编 号 ITEM.NO.	L1	L2	H	孔径(Φ) HOLE DIA.
SQ-1	28	17.5	15.5	6.4
SQ-2	36	26	15.5	6.4




R型固定夹


- 材质: UL认可之尼龙66, 防火等级94V-2.
- 使用方法: 将电缆置于固定扣内, 再以螺丝固定.

R-type cable clamps

- Material: Nylon 66 94v-2 agreed by UL.
- Usage: put cable in, fix by screw.

编 号 ITEM.NO.	A(mm)	B(mm)	C(mm)		D(mm)
			MM	INCH	
CHS-1/8R	9.5	9.6	3.2	1/8"	19.8
CHS-3/16R	9.6	9.6	4.8	3/16"	19.8
CHS-1/4R	12.0	10.0	6.35	1/4"	22.0
CHS-5/16R	12.0	10.0	7.9	5/16"	22.0
CHS-3/8R	12.5	12.0	9.5	3/8"	24.0
CHS-1/2R	15.2	12.0	12.7	1/2"	31.0
CHS-5/8R	18.2	12.0	15.8	5/8"	34.3
CHS-3/4R	18.2	12.0	19.4	3/4"	35.0
CHS-1R	22.0	12.0	25.4	1"	43.0

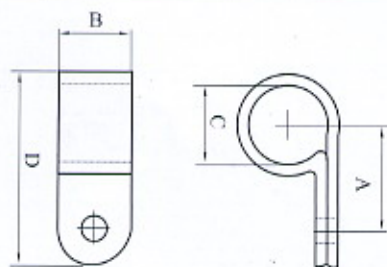

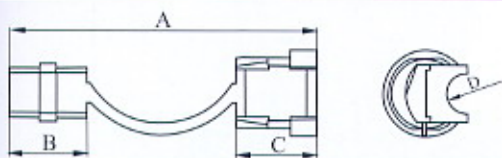

电源护套 Cord Bushing



编 号 ITEM.NO.	A	B	C	D	安装孔径 HOLE DIA.
A3	72.0	18.0	18.0	Φ12.0	Φ18.0
A4	42.0	11.5	11.5	Φ5.0	Φ13.0
A5	38.0	14.0	14.0	Φ6.0	Φ14.0
A6	34.0	10.0	10.0	Φ4.0	Φ9.0
A7	30.0	10.0	10.0	Φ4.0	Φ11.0
A8	41.0	11.0	11.0	Φ5.0	Φ12.0
A9	46.0	12.0	12.0	Φ5.0	Φ10.0

隔离束线扣 Standoff Twist Lock

编 号 ITEM.NO.	A	B	D	安装孔径 HOLE DIA.
STL-11	68	14.3	11.0	Φ5.8
STL-17	51.5	14.3	17.0	Φ5.8


扭式束线扣 Twist Lock


编 号 ITEM.NO.	A	D
TL-5	20	5.0
TL-8	26	8.3
TL-11	30	11.0
TL-13	30	13.3
TL-18	40	17.9
TL-23	43	22.7

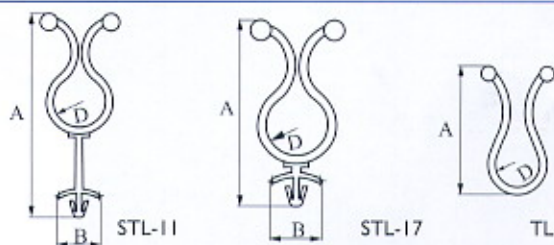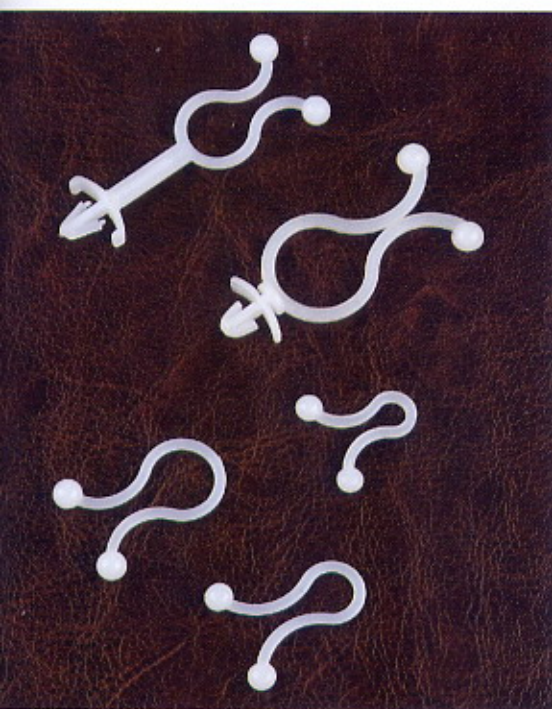


F型管夹 F-TYPE Clips

编 号 ITEM.NO.	H	A	B	D
FTC-25SG	62.5	35	-	6.6
FTC-25DB	62.5	-	61	6.6


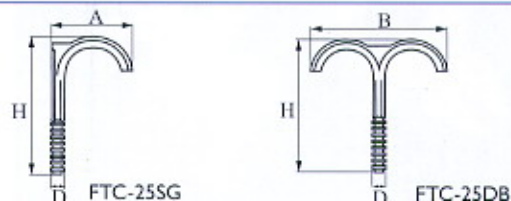


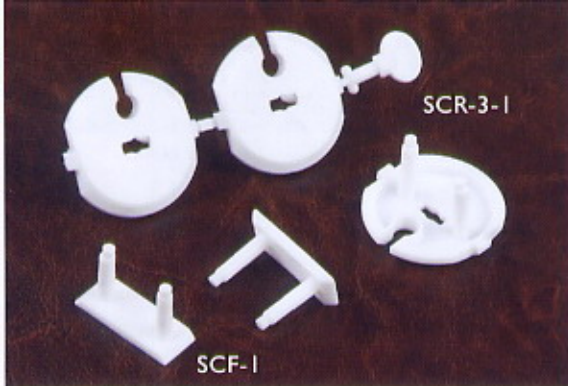


保护盖 Security Cover

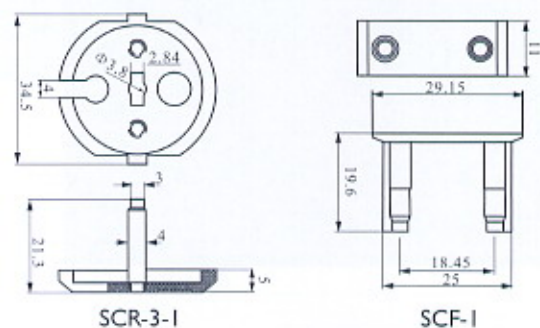

电缆牌 Cable Tag

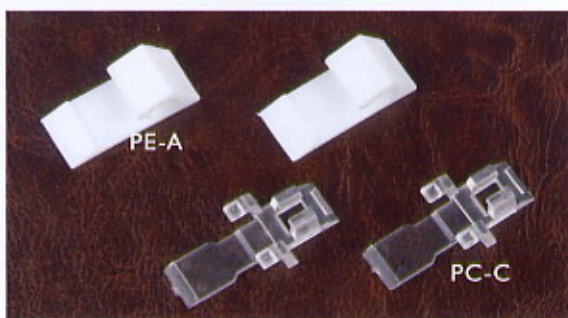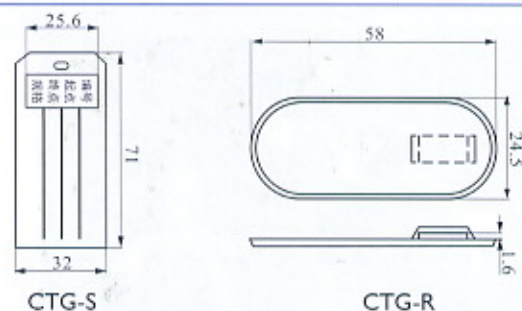





方形卡扣 PE PC Clip

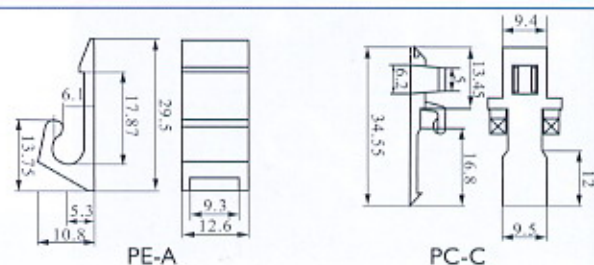

圆形夹线套 Wire Saddle

机翼式束线座 Wire Saddle

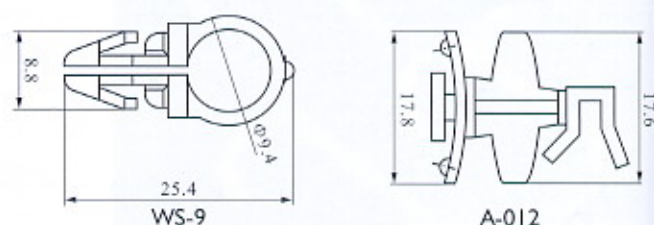

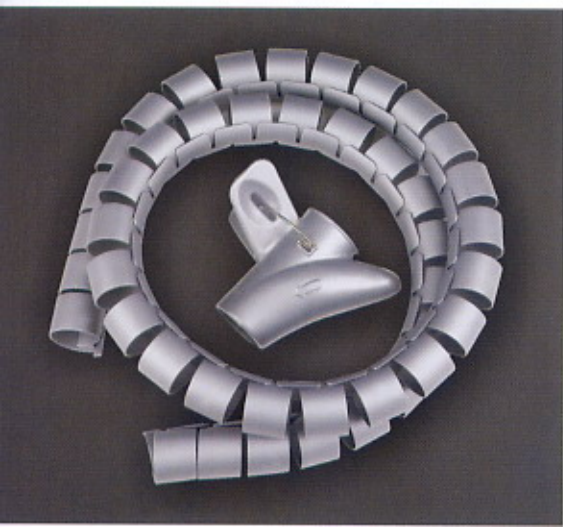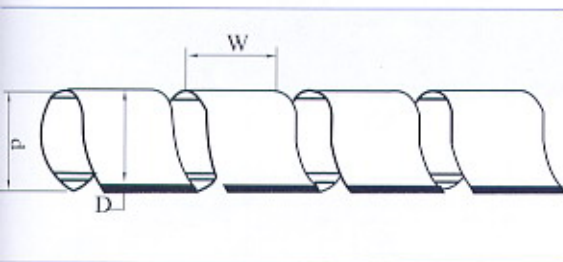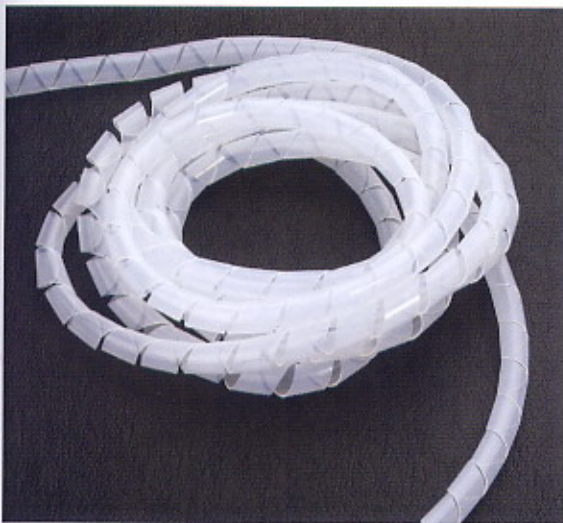

卷式结束保护带(缠绕管)

- 材质：采用PE料制成。
- 使用方法：先用保护带固定起点一端，然后按顺时针方向环绕束紧，即可将电线束为一体。
- 用途：作为保护电线不受磨损及绝缘用，并可改进电线弯曲的外观。

Spiral wrapping bands

- Material: made from PE.
- Usage: fix one end with safety belt first, then circle the wires clockwise to make them tighten.
- Application: a protection wear for electric wires, and make them insulation and look nice.

编号 ITEM.NO.	内径(D) (mm)	外径(D) (mm)	螺距(W) (mm)	捆扎范围 WRAPPING RANGE (mm)	包装 PACKING
SWB-03	1.5	3.0	4.0	1.5-10	10M/ROLL
SWB-06	4	6	7.0	4-50	
SWB-08	6	8	10.8	6-60	
SWB-10	7.5	10	11.4	7.5-60	
SWB-12	9	12	13.9	9-65	
SWB-15	12	15	15.0	12-75	
SWB-19	15	19	18.2	15-100	
SWB-24	20	24	19.6	20-130	
SWB-30	26	30	43.0	26-150	

实用型保护带(附夹子)

编号 ITEM.NO.	内径 (mm)	包装 PACKING
CHT-15A	15	2M or 10M
CHT-20A	20	
CHT-25A	25	
CHT-30A	30	




梅花型套管 Marker tube

编号 ITEM.NO.	套管线径 (sq)	包装 PACKING
TB-0.75	0.75	纸盒 PAPER BOX
TB-1	1	
TB-1.5	1.5	
TB-2.5	2.5	
TB-4	4	
TB-6	6	
TB-8	8	
TB-10	10	
TB-16	16	



异型管 Marker tube

编号 ITEM.NO.	套管线径 (sq)	包装 PACKING
YX-0.75	0.75	1Kg / Roll
YX-1	1	
YX-1.5	1.5	
YX-2.5	2.5	
YX-4	4	
YX-6	6	
YX-8	8	
YX-10	10	
YX-12	12	
YX-16	16	
YX-25	25	
YX-35	35	
YX-50	50	

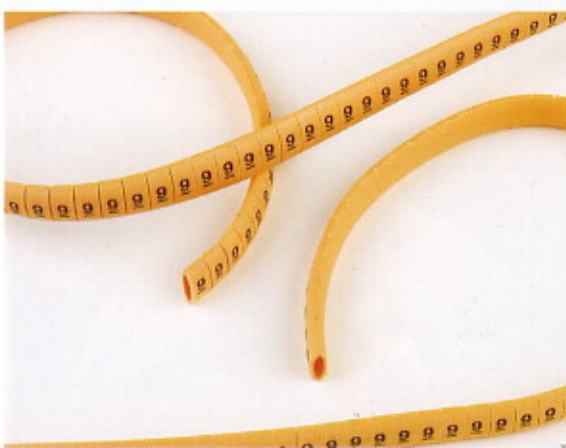

扁型号码管

- 材质：采用优质PVC制成，能防止油性及其他物质侵蚀。
- 特点：适用于线径3.5MM到7.0MM之圆线或扁线用。

Flat cable markers

- Material: made from PVC, oil and erosion control.
- Feature: used for circle of flat wire size from 3.5mm-7.0mm.

编号 ITEM.NO.	适用电线 APPROX WIRE		号码 MARKERS	包装 PACKING
	SQ(平方)	mm		
EC-J	2~8	0.5~7.0	0~9 A-Z + - / \	500PCS/ROLL

圆型号码管

- 材质: 采用优质PVC制成, 能防止油性及其他物质侵蚀, 耐温至85℃
- 构造: 号码管内部成凹型, 具有弹性。内径能随着电线大小而伸缩。

Cable markers

- Material: made from PVC, oil and erosion control, heat resisting up to 85°C.
- Struction: the inside is hollow, but elastic. The diameter can change with the needed wire.

编 号 ITEM.NO.	适用电线 APPROX WIRE		号 码 MARKERS	包 装 PACKING
	SQ(平方)	mm		
EC-0	0.75~1.5	2.0~3.2	0~9 A~Z + - / \	1000PCS/ROLL
EC-1	0.75~3.5	3.0~4.2		1000PCS/ROLL
EC-2	3.5~8.0	3.6~7.4		500PCS/ROLL
EC-3	5.2~10.0	5.2~10.0		250PCS/ROLL

圆型号码管 Cable markers



编 号 ITEM.NO.	适用电线 APPROX WIRE		号 码 MARKERS	包 装 PACKING
	SQ(平方)	mm		
MEC-0	0.75~1.5	2.0~3.2	0~9 A~Z + - / \	450PCS/ROLL
MEC-1	0.75~3.5	3.0~4.2		400PCS/ROLL
MEC-2	3.5~8.0	3.6~7.4		300PCS/ROLL
MEC-3	5.2~10.0	5.2~10.0		250PCS/ROLL

号码带 Cable markers strips

编 号 ITEM.NO.	长(L) (mm)	宽(W) (mm)	包 装 PACKING
MS-90	90	10	100

绝缘配线槽

- 材质：南亚硬质PVC(灰色)，绝缘性良好，不自燃，耐温至85℃。
- 构造：由槽底及槽盖两部分组成，底槽两侧设出线孔。


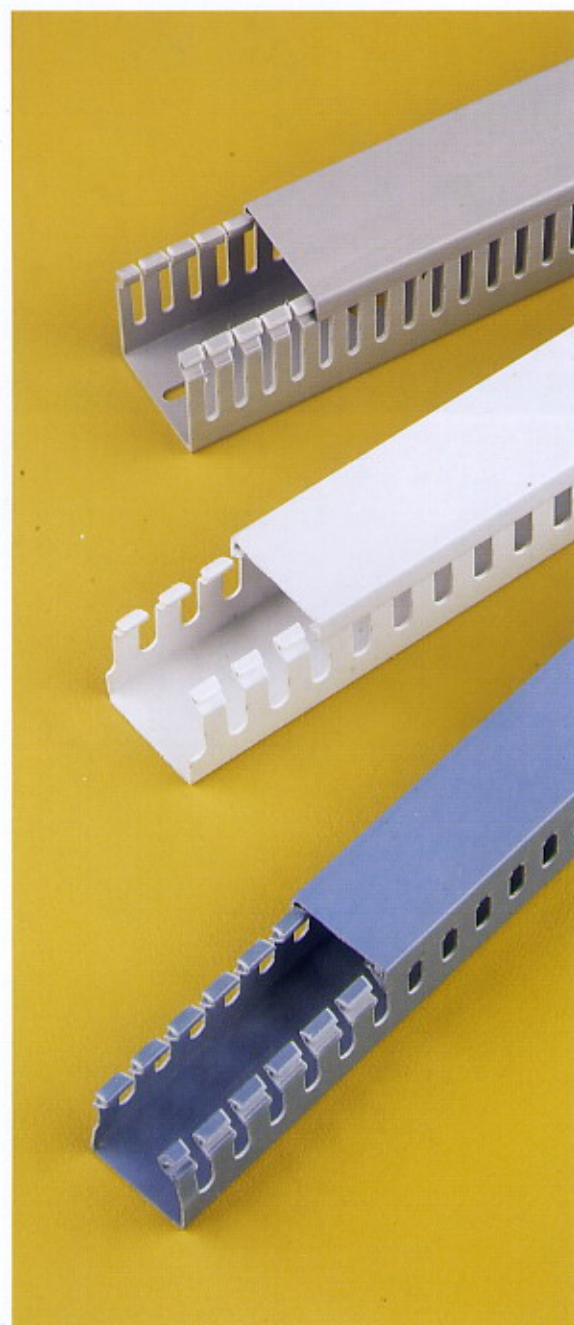
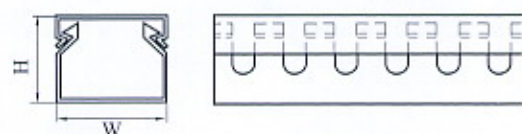


Wiring duct(slotted)

- Material: made from PVC(grey), good insulation and heat-resisting up to 85℃.
- Struction: made up of duct bottom and lid, with two out-holes designed at the bottom.

编号 ITEM.NO.	高 × 宽 H × W	电线容量 CONTAINED WIRE(1.5')	长度 LENGTH
PXC-2015	20 × 15	5-10PCS	2M
PXC-2020	20 × 20	10-15PCS	
PXC-2025	20 × 25	10-20PCS	
PXC-2525	25 × 25	10-25PCS	
PXC-2545	25 × 45	25-40PCS	
PXC-3015	30 × 15	5-15PCS	
PXC-3020	30 × 20	10-20PCS	
PXC-3025	30 × 25	15-25PCS	
PXC-3030	30 × 30	20-30PCS	
PXC-3035	30 × 35	30-45PCS	
PXC-3040	30 × 40	35-50PCS	
PXC-3050	30 × 50	45-60PCS	
PXC-3525	35 × 25	25-35PCS	
PXC-3535	35 × 35	40-55PCS	
PXC-4025	40 × 25	20-40PCS	
PXC-4030	40 × 30	35-50PCS	
PXC-4035	40 × 35	40-50PCS	
PXC-4040	40 × 40	45-55PCS	
PXC-4060	40 × 60	60-80PCS	
PXC-4525	45 × 25	25-40PCS	
PXC-4535	45 × 35	40-55PCS	
PXC-4545	45 × 35	60-70PCS	
PXC-4565	45 × 65	90-100PCS	
PXC-5015	50 × 15	25-35PCS	
PXC-5025	50 × 25	25-45PCS	
PXC-5030	50 × 30	30-55PCS	
PXC-5035	50 × 35	50-60PCS	
PXC-5040	50 × 40	60-70PCS	
PXC-5045	50 × 45	70-85PCS	
PXC-5050	50 × 50	90-100PCS	
PXC-5055	50 × 55	100-110PCS	
PXC-5060	50 × 60	95-105PCS	
PXC-5080	50 × 80	180-200PCS	
PXC-50100	50 × 80	220-250PCS	
PXC-6040	60 × 40	90-100PCS	
PXC-6060	60 × 60	140-160PCS	
PXC-6525	65 × 25	100-110PCS	
PXC-6545	65 × 45	180-200PCS	
PXC-6565	65 × 65	140-160PCS	
PXC-8035	80 × 35	160-180PCS	
PXC-8045	80 × 45	180-200PCS	
PXC-8050	80 × 50	200-220PCS	
PXC-8055	80 × 55	240-290PCS	
PXC-8080	80 × 80	280-350PCS	
PXC-80100	80 × 100	300-400PCS	
PXC-100100	100 × 100	300-400PCS	

特殊规格欢迎订做

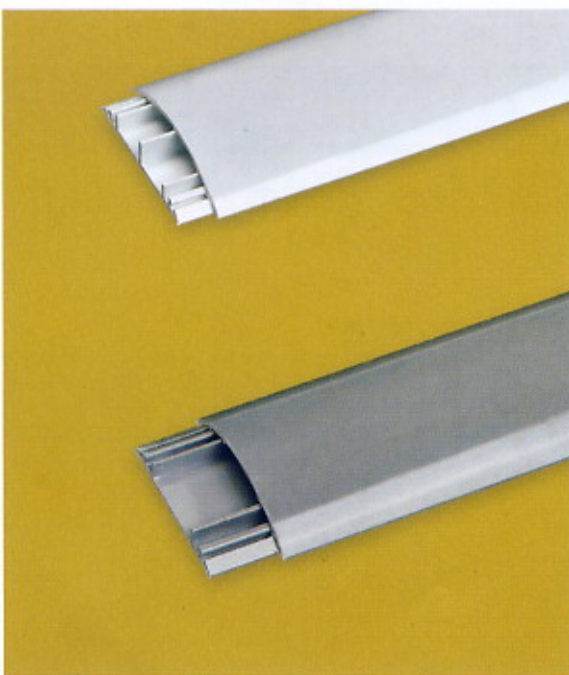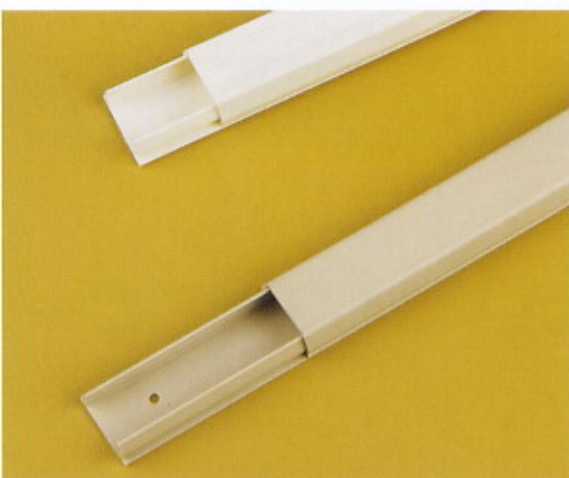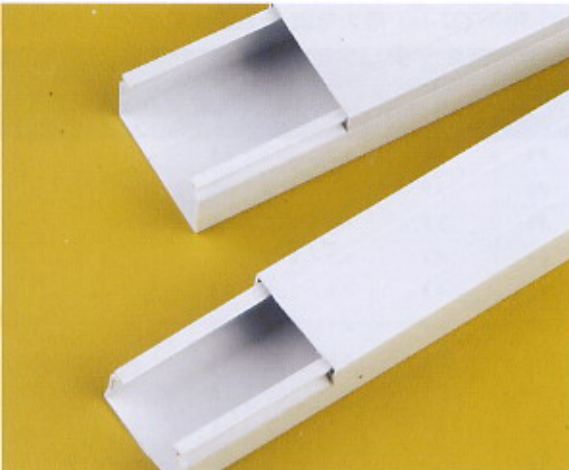

装潢配线槽 Wiring duct(solid)

- Material: made from PVC(WHITE),good insulation and heatresisting up to 85℃.
- Struction: made up of duct bottom and lid.
- Application: used in stage, electric, air conditioning or indoors.
- Feature: solid design, especially for anti-dust and mouse.

编号 ITEM.NO.	高 × 宽 H × W	电线容量 CONTAINED WIRE(1.5 ²)	长度 LENGTH
PZC-1015	10 × 15	3-5PCS	2M
PZC-1020	10 × 20	3-6PCS	
PZC-1025	10 × 25	5-10PCS	
PZC-1525	15 × 25	5-10PCS	
PZC-2030	20 × 30	10-20PCS	
PZC-2035	20 × 35	15-25PCS	
PZC-2540	25 × 40	20-40PCS	
PZC-3050	30 × 50	30-50PCS	
PZC-3060	30 × 60	55-65PCS	
PZC-5080	50 × 80	180-200PCS	
PZC-50100	50 × 100	220-250PCS	
PZC-80100	80 × 100	260-350PCS	
PZC-100100	100 × 100	300-400PCS	

日式电话配线槽 Telephone wiring duct (self-adhesive)


- Material: made from PVC(WHITE),good insulation and heatresisting up to 85℃.
- Feature: spacious designed,and the strong adhesive tape in the duct button

编号 ITEM.NO.	宽 W1(mm)	宽 W2(mm)	高 H(mm)	长度 L(mm)
JTD-1	10.40	7.30	8.0	每支 1M (背附双面胶)
JTD-2	14.50	11.80	8.0	
JTD-3	17.50	15.60	11.0	
JTD-4	23.50	19.50	12.2	


弧形配线槽 Round type wiring duct

- Material: High impact, rigid, self-extinguishing PVC
- Service temperature: 85℃
- Backed with high quality double sided tape for permanent stick. Good for floor wiring to facilitate trolley pass and to avoid trip.


编号 ITEM.NO.	外宽 W	内宽 W1	外高 H	内高 H1
K-RTD-2	20mm	8mm	6mm	4mm
K-RTD-3	30mm	11mm	8mm	6mm
K-RTD-4	40mm	16mm	9.5mm	7mm
K-RTD-5	50mm	20mm	11mm	8mm
K-RTD-6	60mm	30mm	13mm	9mm
K-RTD-7	70mm	40mm	15mm	10mm
K-RTD-9	90mm	45mm	19mm	15mm
K-RTD-12	120mm	70mm	25mm	21mm



装潢配线槽
Wiring duct(solid)



日式电话配线槽
Telephone wiring duct



弧形配线槽
Round type wiring duct