


TG-100

将束带拉紧并切断，适用束带宽度为2.4~4.8mm

For tensloning and cut-off cable tie from width 2.4mm to 4.8mm
FOR " DIY " ONLY

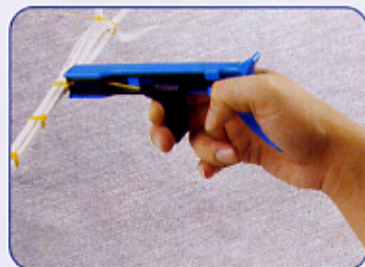

CHS-600A

适用于尼龙扎带宽度:2.4~4.8mm以下6.3" (160mm)

适用于快速捆扎电缆电线: 自动切断扎带剩余部分

捆切合二为一，可用的塑料扎带长50~350mm 宽4.8mm以下

重量: 0.30kg 长度: 165mm 材质: 金属制

Suitable for fast bind wire and cable automatic cut-and -bind left part

Deviding cable tie 50~350mm,its width 4.8mm

Weight:0.30kg L:165mm Material: Metal



CHS-500

适用于尼龙扎带宽度:2.4~4.8mm以下6.3" (160mm)

适用于快速捆扎电缆电线: 自动切断扎带剩余部分


捆切合二为一，可用的塑料扎带长50~350mm 宽4.8mm以下
材质: 塑胶制

Suitable for fast bind wire and cable automatic cut-and -bind left part

Deviding cable tie 50~350mm,its width 4.8mm

Material: Plastic



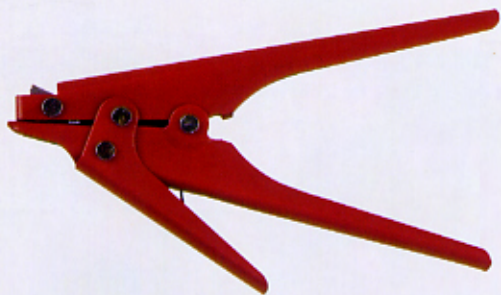

CHS-519

适用于尼龙扎带宽度:2.4~9.0mm以下7.5" (195mm)



适用于快速捆扎电缆电线:自动切断扎带剩余部分

捆切合二为一, 可用的塑料扎带长50~500mm 线带宽9mm以下

重量: 0.26kg 长度: 195mm 材质: 金属制

Suitable for fast bind wire and cable automatic cut-and-bind left part
Deviding cable tie 50~500mm, its width 9.0mm

Weight: 0.26kg L: 195mm Material: Metal

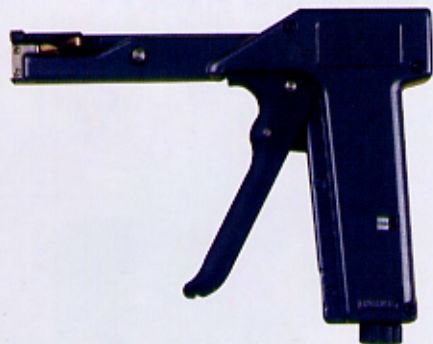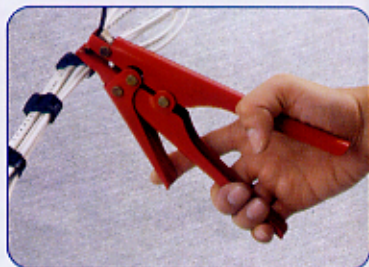

CTG-001

旋转拉力强度调校掣用以调校拉力: 1-3号适用

于宽度2.5mm以下扎带, 3-6号适用于3.6mm以下扎带,


6-8适用于4.8mm以下扎带。

重量: 0.32kg 长度: 180mm 材质: 金属

Adjusting knob to correct number in window of handle:

1-3 for miniature cross section ties (2.5mm) ; 3-6 for intermediate cross section ties (3.6mm) ; and 6-8 for standard cross section cable ties (4.8mm) .

Weight: 0.32 kg L: 180mm Material: Metal

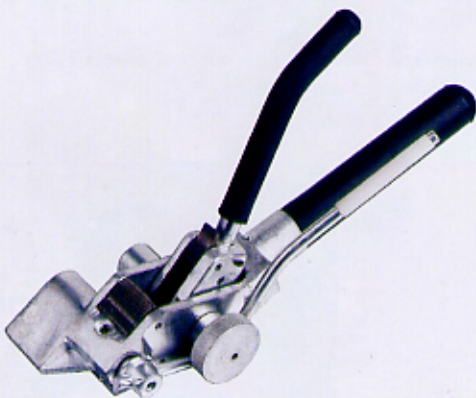

LQA-001

适用于不锈钢扎带, 快速将钢带拉紧并切断, 也可以调整捆扎时候的压力。

Suitable for stainless steel cable ties, fast tighten cable ties and cut off the left part of cable tie, adjust the pressure for pack


CHS-30J



适用于预绝缘端头及全绝缘中间接头
压线规格: 0.5-6mm²
Suitable for pre-insulation terminal and
full insulation mediate connector
Cable Range: 0.5-6mm²




LY-03C/HS-03C

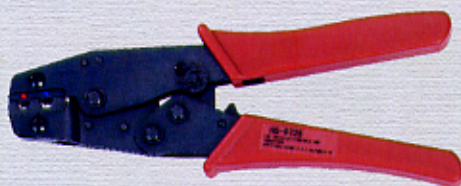

适用于预绝缘端头及全绝缘中间接头
压线规格: 0.5-6mm²
Suitable for pre-insulation terminal and
full insulation mediate connector
Cable Range: 0.5-6mm²



CHS-0725

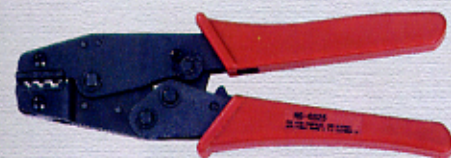

适用于预绝缘端头及全绝缘中间接头
压线规格: 0.5-2.5mm²
Suitable for pre-insulation terminal and
full insulation mediate connector
Cable Range: 0.5-2.5mm²



SN-02C



适用于预绝缘端头及全绝缘中间接头
压线规格: 0.25-2.5mm²
Suitable for pre-insulation terminal and
full insulation mediate connector
Cable Range: 0.25-2.5mm²



HS-0325



适用于裸端头
压线规格: 0.5-2.5mm²
For non-insulated terminal
Cable Range: 0.5-2.5mm²



SN-02



适用于裸端头
压线规格: 0.25-2.5mm²
For non-insulated terminal
Cable Range: 0.25-2.5mm²



HS-101



适用于裸端头及压线帽
压线规格: 1.0-10mm²
For non-insulated terminal and wire joints
Cable Range: 1.0-10mm²



HS-103/LY13C



适用于压线帽
压线规格: 0.5-6mm²
For wire joints
Cable Range: 0.5-6mm²



HS-03B



适用于插簧及连接端头
压线规格: 1.5-6mm²
For open barrel terminals (female & male)
Cable Range: 1.5-6mm²



HS-11011



适用于插管及连接端头
For open barrel terminals
(female & male)



HS-04WF



适用于管形预绝缘端头
压线规格: 1.0-6mm²
Suitable for insulation cord end terminals
Cable Range: 1.0-6mm²



HSC8 6-4 0.08-6mm² HSC8 6-6 0.25-6mm²



适用于管形预绝缘端头
Suitable for insulation cord end terminals



HS-05WF 0.5-6mm² HS-06WF 0.25-6mm² HS-16WF 6-6mm²



适用于管形预绝缘端头
Suitable for insulation cord end terminals



SN-05WF 0.5-4mm² SN-16WF 6-16mm²



适用于管形预绝缘端头
Suitable for insulation cord end terminals




HS-26TW



适用于管型预绝缘端头
压线规格: 0.5-6mm²
Suitable for tube type pre-insulation terminal
Cable Range: 0.5-6mm²



HS-35WF

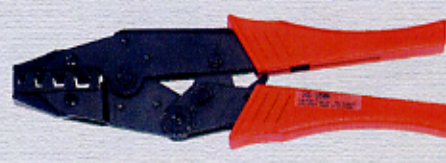

适用于管型预绝缘端头
压线规格: 10-35mm²
Suitable for tube type pre-insulation terminal
Cable Range: 10-35mm²



HS-8 1.25-8mm²
HS-14 5.5-14mm²
HS-16 1.25-16mm²



适用于裸端头
 Suitable for non-insulated terminal



HS-22 5.5-25mm²
HS-38 5.5-38mm²



适用于裸端头
 Suitable for non-insulated terminal




HX-50B 6-50mm²
HX-120B 10-120mm²
HX-150B 25-150mm²
HX-245B 70-240mm²



适用于管口铜接端头
 Suitable for copper tube terminals
 /cable lugs




CT-150



适用于管口铜接端头
 压线规格: 16-150mm²
 Suitable for copper tube terminals/cable lugs
 Cable Range: 16-150mm²




HS-1040 8-16mm²
HS-1041 0.9-6mm²
HS-1042 0.2-1.25mm²
HS-1043 0.25-0.65mm²

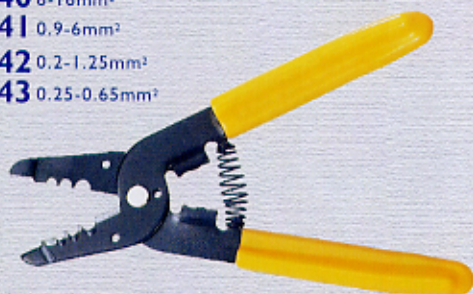

适用于剥电线、剪线及压接裸端头
 Suitable for wire-peeling wire cutting and
 wire combining terminal

HS-700A 0.5-2mm²
HS-700B 1.0-3.2mm²

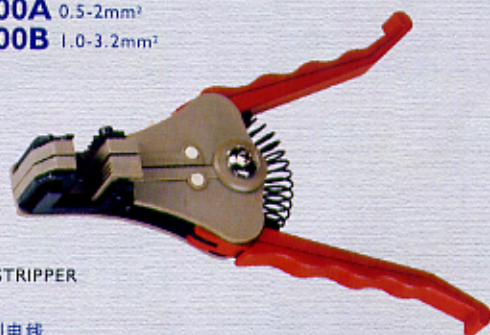

WIRE STRIPPER


适用于剥电线
 Suitable for peeling a wire

LK-125 Max 125mm²
LK-250 Max 250mm²
LK-500 Max 500mm²



适用于剪电缆线钳
 Suitable for cutting copper
 and aluminum cable

HS-325A Max 240mm²
HS-520A Max 400mm²

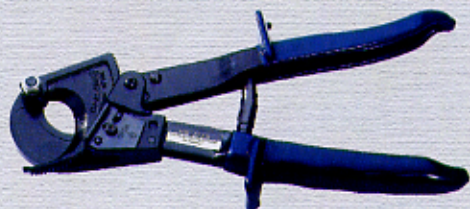

适用于剪电缆线钳
 Suitable for cable pincer